


STD-A

cover elevator

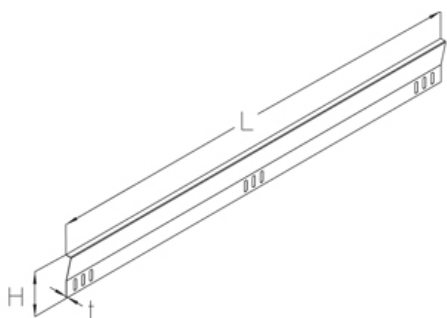

Three KLS 8X16 are required to screw the STD-A to the LGG 60 and STU 50. Three KLS 10X20 are required to screw the STD-A to the STU 60. Three BS 4.2X13GV are required to fix the cable tray cover (RD) to the STD-A in conjunction with the sendzimir galvanised version. Three BLS 3.9X13E are required to fix the cable tray cover (RD) to the STD-A in conjunction with the hot-dip galvanised or stainless steel version. The cable tray cover and the fastening accessories are not included in the scope of delivery.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	length	t	weight
STD-A 150S	150 mm	1500 mm	1.00 mm	1.98 kg	
STD-A 180S	180 mm	1500 mm	1.00 mm	2.33 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)






Артикул	Product	height	length	t	weight
STD-A 150F	150 mm	1500 mm	1.00 mm	2.12 kg	
STD-A 180F	180 mm	1500 mm	1.00 mm	2.50 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	length	t	weight
STD-A 150E	150 mm	1500 mm	1.00 mm	2.01 kg	
STD-A 180E	180 mm	1500 mm	1.00 mm	2.37 kg	

Product: Product**height:** height**length:** length**t:** material thickness**weight:** weight

DETAILS / APPLICATIONS

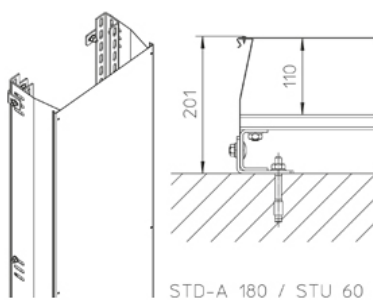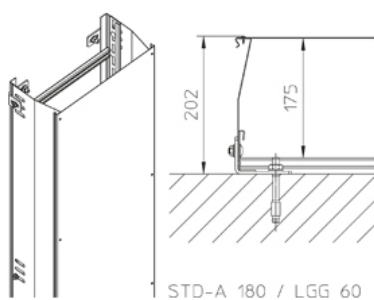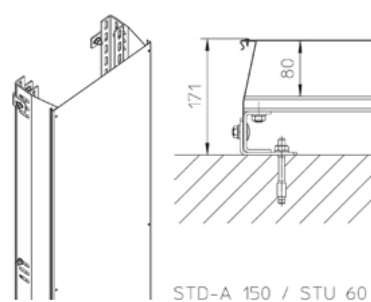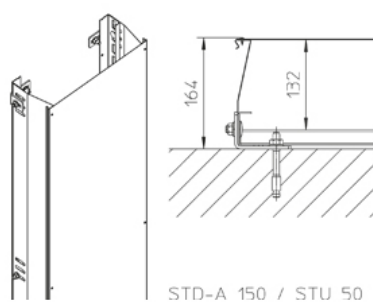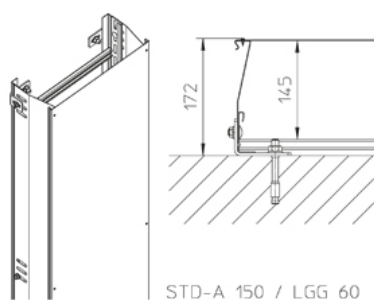

ACCESSORIES

ST-RD,

