


STIS

rung

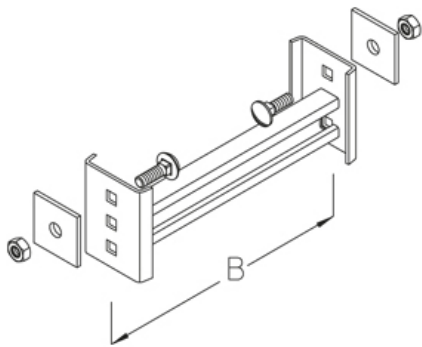

The producte can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	Pmax	weight	incl.
STIS 02F	200 mm	2.50 kN	0.90 kg	show all inclusive accessoires	
STIS 03F	300 mm	2.50 kN	1.10 kg	show all inclusive accessoires	
STIS 04F	400 mm	2.50 kN	1.20 kg	show all inclusive accessoires	
STIS 05F	500 mm	2.50 kN	1.40 kg	show all inclusive accessoires	
STIS 06F	600 mm	2.50 kN	1.60 kg	show all inclusive accessoires	
STIS 07F	700 mm	2.50 kN	1.70 kg	show all inclusive accessoires	
STIS 08F	800 mm	2.50 kN	1.90 kg	show all inclusive accessoires	
STIS 09F	900 mm	2.50 kN	2.10 kg	show all inclusive accessoires	
STIS 10F	1000 mm	2.50 kN	2.20 kg	show all inclusive accessoires	
STIS 11F	1100 mm	2.50 kN	2.40 kg	show all inclusive accessoires	
STIS 12F	1200 mm	2.50 kN	2.50 kg	show all inclusive accessoires	

Product: Product
width: width
Pmax: Maximum load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

