


STISD

rung

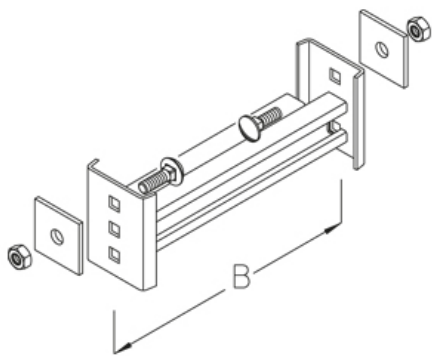

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	Pmax	weight	incl.
STISD 02F	200 mm	5.00 kN	1.20 kg	show all inclusive accessoires	
STISD 03F	300 mm	5.00 kN	1.50 kg	show all inclusive accessoires	
STISD 04F	400 mm	5.00 kN	1.90 kg	show all inclusive accessoires	
STISD 05F	500 mm	5.00 kN	2.20 kg	show all inclusive accessoires	
STISD 06F	600 mm	5.00 kN	2.50 kg	show all inclusive accessoires	
STISD 07F	700 mm	5.00 kN	2.90 kg	show all inclusive accessoires	
STISD 08F	800 mm	5.00 kN	3.20 kg	show all inclusive accessoires	
STISD 09F	900 mm	5.00 kN	3.50 kg	show all inclusive accessoires	
STISD 10F	1000 mm	5.00 kN	3.90 kg	show all inclusive accessoires	
STISD 11F	1100 mm	5.00 kN	4.20 kg	show all inclusive accessoires	
STISD 12F	1200 mm	5.00 kN	4.50 kg	show all inclusive accessoires	

Product: Product
width: width
Pmax: Maximum load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

$P_{\max} = 5,0 \text{ kN}$

