


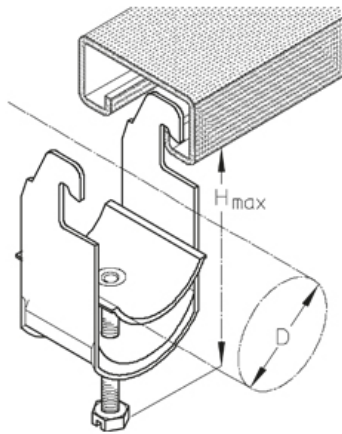

AC

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C+, C60°) with a slot size of 18/22 mm. certified according to DIN 4102-12

Articles with a diameter of 12-56mm are also available in stainless steel finish, material No. 1.4571 / 1.4404 (V4A).

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 AC	8-12 mm	41 mm	2 Nm	1	2.70 kg/100	
16 AC	12-16 mm	46 mm	2 Nm	1	3.10 kg/100	
20 AC	16-20 mm	50 mm	2 Nm	1	3.50 kg/100	
24 AC	20-24 mm	54 mm	2 Nm	1	3.70 kg/100	
28 AC	24-28 mm	58 mm	2 Nm	1	4.20 kg/100	
32 AC	28-32 mm	63 mm	2 Nm	1	6.40 kg/100	
36 AC	32-36 mm	67 mm	2 Nm	1	6.70 kg/100	
40 AC	36-40 mm	71 mm	2 Nm	1	7.50 kg/100	
44 AC	40-44 mm	81 mm	4 Nm	1	9.60 kg/100	
48 AC	44-48 mm	85 mm	4 Nm	1	9.80 kg/100	
52 AC	48-52 mm	90 mm	4 Nm	1	10.70 kg/100	
56 AC	52-56 mm	94 mm	4 Nm	1	11.50 kg/100	
60 AC	56-60 mm	98 mm	4 Nm	1	15.10 kg/100	
64 AC	60-64 mm	102 mm	4 Nm	1	15.90 kg/100	
70 AC	64-70 mm	109 mm	4 Nm	1	16.90 kg/100	
76 AC	70-76 mm	113 mm	4 Nm	1	23.30 kg/100	
82 AC	76-82 mm	119 mm	4 Nm	1	25.80 kg/100	
88 AC	82-88 mm	125 mm	4 Nm	1	27.30 kg/100	
94 AC	88-94 mm	131 mm	4 Nm	1	29.60 kg/100	
100 AC	94-100 mm	137 mm	4 Nm	1	32 kg/100	
110 AC	100-110 mm	157 mm	4 Nm	1	35 kg/100	
120 AC	110-120 mm	167 mm	4 Nm	1	37.40 kg/100	
150 AC	145-150 mm	203 mm	6 Nm	1	104.60 kg/100	
175 AC	170-175 mm	228 mm	6 Nm	1	130.30 kg/100	
12/2 AC	8-12 mm	58 mm	2 Nm	2	3.50 kg/100	
16/2 AC	12-16 mm	67 mm	2 Nm	2	4 kg/100	
20/2 AC	16-20 mm	75 mm	2 Nm	2	4.60 kg/100	
24/2 AC	20-24 mm	84 mm	2 Nm	2	5 kg/100	
28/2 AC	24-28 mm	92 mm	2 Nm	2	5.70 kg/100	

Артикул	Product	diameter	Hmax	torque	number of cables	weight
32/2 AC	28-32 mm	101 mm	2 Nm	2	8.90 kg/100	
36/2 AC	32-36 mm	109 mm	2 Nm	2	9.90 kg/100	
40/2 AC	36-40 mm	117 mm	2 Nm	2	11.40 kg/100	
44/2 AC	40-44 mm	127 mm	4 Nm	2	13.10 kg/100	
48/2 AC	44-48 mm	135 mm	4 Nm	2	14.20 kg/100	
52/2 AC	48-52 mm	144 mm	4 Nm	2	15.70 kg/100	
56/2 AC	52-56 mm	152 mm	4 Nm	2	15.90 kg/100	
12/3 AC	8-12 mm	71 mm	2 Nm	3	4.30 kg/100	
16/3 AC	12-16 mm	85 mm	2 Nm	3	5.10 kg/100	
20/3 AC	16-20 mm	97 mm	2 Nm	3	5.90 kg/100	
24/3 AC	20-24 mm	110 mm	2 Nm	3	6.70 kg/100	
28/3 AC	24-28 mm	122 mm	2 Nm	3	7.40 kg/100	

Aluminium

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 AC-AL	8-12 mm	41 mm	1.50 Nm	1	1.20 kg/100	
16 AC-AL	12-16 mm	46 mm	1.50 Nm	1	1.40 kg/100	
20 AC-AL	16-20 mm	50 mm	1.50 Nm	1	1.60 kg/100	
24 AC-AL	20-24 mm	54 mm	1.50 Nm	1	1.80 kg/100	
28 AC-AL	24-28 mm	58 mm	1.50 Nm	1	2 kg/100	
32 AC-AL	28-32 mm	63 mm	1.50 Nm	1	3.30 kg/100	
36 AC-AL	32-36 mm	67 mm	1.50 Nm	1	3.60 kg/100	
40 AC-AL	36-40 mm	71 mm	1.50 Nm	1	4 kg/100	
44 AC-AL	40-44 mm	81 mm	3 Nm	1	4.30 kg/100	
48 AC-AL	44-48 mm	85 mm	3 Nm	1	4.60 kg/100	
52 AC-AL	48-52 mm	90 mm	3 Nm	1	5.30 kg/100	
56 AC-AL	52-56 mm	94 mm	3 Nm	1	5.60 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 AC-E	8-12 mm	41 mm	2 Nm	1	2.60 kg/100	
16 AC-E	12-16 mm	46 mm	2 Nm	1	2.90 kg/100	
20 AC-E	16-20 mm	50 mm	2 Nm	1	3.20 kg/100	
24 AC-E	20-24 mm	54 mm	2 Nm	1	3.60 kg/100	
28 AC-E	24-28 mm	58 mm	2 Nm	1	4.10 kg/100	
32 AC-E	28-32 mm	63 mm	2 Nm	1	4.80 kg/100	
36 AC-E	32-36 mm	67 mm	2 Nm	1	5.80 kg/100	
40 AC-E	36-40 mm	71 mm	2 Nm	1	6.60 kg/100	
44 AC-E	40-44 mm	81 mm	4 Nm	1	8.60 kg/100	
48 AC-E	44-48 mm	85 mm	4 Nm	1	9.10 kg/100	
52 AC-E	48-52 mm	90 mm	4 Nm	1	9.80 kg/100	
56 AC-E	52-56 mm	94 mm	4 Nm	1	10.80 kg/100	

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12/2 AC-E	8-12 mm	58 mm	2 Nm	2	3.40 kg/100	
16/2 AC-E	12-16 mm	67 mm	2 Nm	2	3.80 kg/100	
20/2 AC-E	16-20 mm	75 mm	2 Nm	2	4.30 kg/100	
24/2 AC-E	20-24 mm	84 mm	2 Nm	2	5 kg/100	
28/2 AC-E	24-28 mm	92 mm	2 Nm	2	5.40 kg/100	
32/2 AC-E	28-32 mm	101 mm	2 Nm	2	7.30 kg/100	
36/2 AC-E	32-36 mm	109 mm	2 Nm	2	8.10 kg/100	
40/2 AC-E	36-40 mm	117 mm	2 Nm	2	9.70 kg/100	
44/2 AC-E	40-44 mm	127 mm	4 Nm	2	11.70 kg/100	
48/2 AC-E	44-48 mm	135 mm	4 Nm	2	12.90 kg/100	
52/2 AC-E	48-52 mm	144 mm	4 Nm	2	14 kg/100	
56/2 AC-E	52-56 mm	152 mm	4 Nm	2	14.90 kg/100	

Product: Product

diameter: diameter




Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

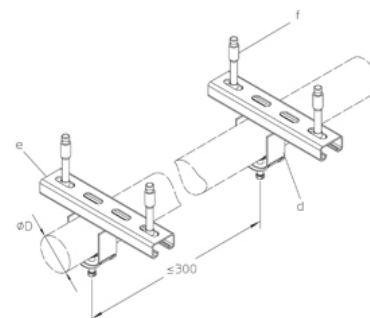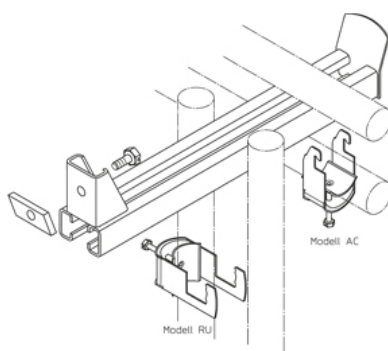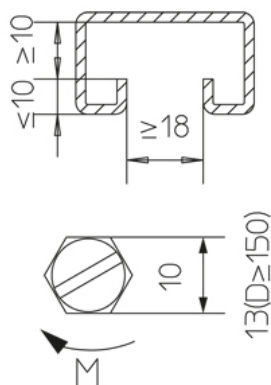

ACCESSORIES

A 2, A 4, A 7, A 8, A 9, KHA 21, A 41, KHA 41,

