


STLS

rung

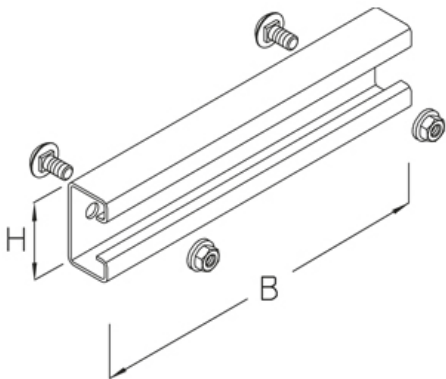

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	weight	incl.
STLS 02S	40 mm	203 mm	0.24 kg	show all inclusive accessoires	
STLS 03S	40 mm	293 mm	0.36 kg	show all inclusive accessoires	
STLS 04S	40 mm	393 mm	0.47 kg	show all inclusive accessoires	
STLS 05S	40 mm	493 mm	0.59 kg	show all inclusive accessoires	
STLS 06S	40 mm	593 mm	0.70 kg	show all inclusive accessoires	
STLS 07S	40 mm	693 mm	0.82 kg	show all inclusive accessoires	
STLS 08S	40 mm	793 mm	0.94 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	weight	incl.
STLS 02F	40 mm	203 mm	0.27 kg	show all inclusive accessoires	
STLS 03F	40 mm	293 mm	0.38 kg	show all inclusive accessoires	
STLS 04F	40 mm	393 mm	0.50 kg	show all inclusive accessoires	
STLS 05F	40 mm	493 mm	0.63 kg	show all inclusive accessoires	
STLS 06F	40 mm	593 mm	0.75 kg	show all inclusive accessoires	
STLS 07F	40 mm	693 mm	0.88 kg	show all inclusive accessoires	
STLS 08F	40 mm	793 mm	1.00 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

