


KHUV 60

connector, KHU 60

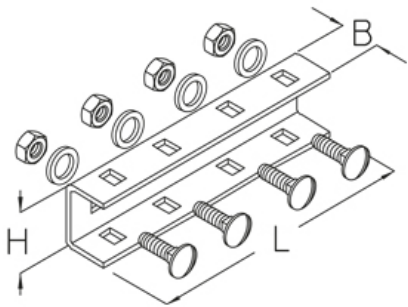

galvanized, according to ISO 4042

Артикул	Product	height	width	length	weight	incl.
KHUV 60GV	51 mm	35 mm	210 mm	0.74 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	weight	incl.
KHUV 60F	51 mm	35 mm	210 mm	0.80 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	weight	incl.
KHUV 60E	51 mm	35 mm	210 mm	0.89 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	weight	incl.
KHUV 60E4	51 mm	35 mm	210 mm	0.89 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
length: length
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

