


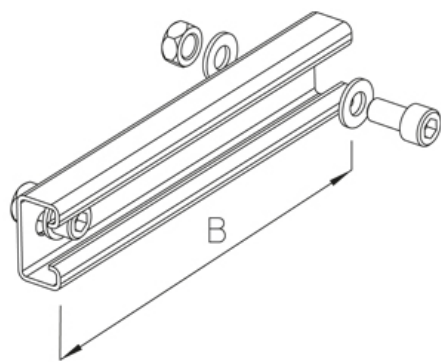

STUS 60

rung

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	weight	incl.
STUS 60-02F	200 mm	0.37 kg	show all inclusive accessoires	
STUS 60-03F	300 mm	0.53 kg	show all inclusive accessoires	
STUS 60-04F	400 mm	0.67 kg	show all inclusive accessoires	
STUS 60-05F	500 mm	0.83 kg	show all inclusive accessoires	
STUS 60-06F	600 mm	0.97 kg	show all inclusive accessoires	
STUS 60-07F	700 mm	1.13 kg	show all inclusive accessoires	
STUS 60-08F	800 mm	1.27 kg	show all inclusive accessoires	
STUS 60-09F	900 mm	1.38 kg	show all inclusive accessoires	
STUS 60-10F	1000 mm	1.60 kg	show all inclusive accessoires	
STUS 60-11F	1100 mm	1.76 kg	show all inclusive accessoires	
STUS 60-12F	1200 mm	1.92 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	weight	incl.
STUS 60-02E	200 mm	0.37 kg	show all inclusive accessoires	
STUS 60-03E	300 mm	0.53 kg	show all inclusive accessoires	
STUS 60-04E	400 mm	0.67 kg	show all inclusive accessoires	
STUS 60-05E	500 mm	0.83 kg	show all inclusive accessoires	
STUS 60-06E	600 mm	0.97 kg	show all inclusive accessoires	
STUS 60-07E	700 mm	1.13 kg	show all inclusive accessoires	
STUS 60-08E	800 mm	1.27 kg	show all inclusive accessoires	
STUS 60-09E	900 mm	1.38 kg	show all inclusive accessoires	
STUS 60-10E	1000 mm	1.60 kg	show all inclusive accessoires	
STUS 60-11E	1100 mm	1.76 kg	show all inclusive accessoires	
STUS 60-12E	1200 mm	1.92 kg	show all inclusive accessoires	

Product: Product

width: width

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

