



ST 81

vertical cable ladder, I-profile

Vertical ladder, heavy building class, beams made of profile I 80, continuously elongated hole perforation in bars, rungs made of profile rail 40x22 mm to be screwed in.

Beams and rungs are delivered not mounted including screws and nuts.
External dimension = B + 42 mm



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	Pmax	weight	incl.
ST 81-02-3F	200 mm	3000 mm	2.50 kN	41.24 kg	show all inclusive accessoires	
ST 81-03-3F	300 mm	3000 mm	2.50 kN	42.09 kg	show all inclusive accessoires	
ST 81-04-3F	400 mm	3000 mm	2.50 kN	42.89 kg	show all inclusive accessoires	
ST 81-05-3F	500 mm	3000 mm	2.50 kN	43.74 kg	show all inclusive accessoires	
ST 81-06-3F	600 mm	3000 mm	2.50 kN	44.54 kg	show all inclusive accessoires	
ST 81-07-3F	700 mm	3000 mm	2.50 kN	45.39 kg	show all inclusive accessoires	
ST 81-08-3F	800 mm	3000 mm	2.50 kN	46.19 kg	show all inclusive accessoires	
ST 81-09-3F	900 mm	3000 mm	2.50 kN	47.04 kg	show all inclusive accessoires	
ST 81-10-3F	1000 mm	3000 mm	2.50 kN	47.84 kg	show all inclusive accessoires	
ST 81-11-3F	1100 mm	3000 mm	2.50 kN	48.69 kg	show all inclusive accessoires	
ST 81-12-3F	1200 mm	3000 mm	2.50 kN	49.49 kg	show all inclusive accessoires	
ST 81-02F	200 mm	6000 mm	2.50 kN	82.50 kg	show all inclusive accessoires	
ST 81-03F	300 mm	6000 mm	2.50 kN	84 kg	show all inclusive accessoires	
ST 81-04F	400 mm	6000 mm	2.50 kN	85.50 kg	show all inclusive accessoires	
ST 81-05F	500 mm	6000 mm	2.50 kN	87 kg	show all inclusive accessoires	
ST 81-06F	600 mm	6000 mm	2.50 kN	88.50 kg	show all inclusive accessoires	
ST 81-07F	700 mm	6000 mm	2.50 kN	90 kg	show all inclusive accessoires	
ST 81-08F	800 mm	6000 mm	2.50 kN	91.50 kg	show all inclusive accessoires	
ST 81-09F	900 mm	6000 mm	2.50 kN	93 kg	show all inclusive accessoires	
ST 81-10F	1000 mm	6000 mm	2.50 kN	94.50 kg	show all inclusive accessoires	
ST 81-11F	1100 mm	6000 mm	2.50 kN	96 kg	show all inclusive accessoires	
ST 81-12F	1200 mm	6000 mm	2.50 kN	97.50 kg	show all inclusive accessoires	

Product: Product

width: width

length: length



Pmax: Maximum load

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

$$q \times B = P_{\max} = 2.5 \text{ kN}$$

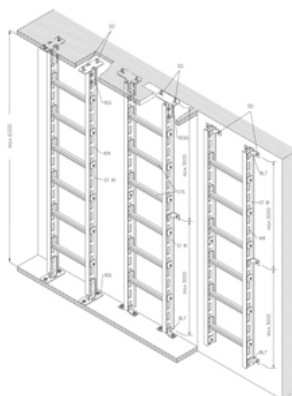

ACCESSORIES

STDE, STIS, STR 110, BGI, BGIQ, BL 7, SI, AC, HKI,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

