


ST 82

vertical cable ladder, I-profile



Vertical ladder, heavy building class, beams made of profile I 80, continuously elongated hole perforation in bars for both-sided cable load, rungs made of profile rail 40x22 mm to be screwed in.

Beams and rungs are delivered not mounted including screws and nuts.
External dimension = B + 42 mm




Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	Pmax	weight	incl.
ST 82-02-3F	200 mm	3000 mm	5.00 kN	42.55 kg	show all inclusive accessoires	
ST 82-03-3F	300 mm	3000 mm	5.00 kN	44.15 kg	show all inclusive accessoires	
ST 82-04-3F	400 mm	3000 mm	5.00 kN	45.71 kg	show all inclusive accessoires	
ST 82-05-3F	500 mm	3000 mm	5.00 kN	47.30 kg	show all inclusive accessoires	
ST 82-06-3F	600 mm	3000 mm	5.00 kN	48.15 kg	show all inclusive accessoires	
ST 82-07-3F	700 mm	3000 mm	5.00 kN	50.50 kg	show all inclusive accessoires	
ST 82-08-3F	800 mm	3000 mm	5.00 kN	52.10 kg	show all inclusive accessoires	
ST 82-09-3F	900 mm	3000 mm	5.00 kN	53.70 kg	show all inclusive accessoires	
ST 82-10-3F	1000 mm	3000 mm	5.00 kN	55.30 kg	show all inclusive accessoires	
ST 82-11-3F	1100 mm	3000 mm	5.00 kN	56.90 kg	show all inclusive accessoires	
ST 82-12-3F	1200 mm	3000 mm	5.00 kN	58.47 kg	show all inclusive accessoires	
ST 82-02F	200 mm	6000 mm	5.00 kN	85.50 kg	show all inclusive accessoires	
ST 82-03F	300 mm	6000 mm	5.00 kN	88 kg	show all inclusive accessoires	
ST 82-04F	400 mm	6000 mm	5.00 kN	91.50 kg	show all inclusive accessoires	
ST 82-05F	500 mm	6000 mm	5.00 kN	94.50 kg	show all inclusive accessoires	
ST 82-06F	600 mm	6000 mm	5.00 kN	97.50 kg	show all inclusive accessoires	
ST 82-07F	700 mm	6000 mm	5.00 kN	100.50 kg	show all inclusive accessoires	
ST 82-08F	800 mm	6000 mm	5.00 kN	103.50 kg	show all inclusive accessoires	
ST 82-09F	900 mm	6000 mm	5.00 kN	106.50 kg	show all inclusive accessoires	
ST 82-10F	1000 mm	6000 mm	5.00 kN	109.50 kg	show all inclusive accessoires	
ST 82-11F	1100 mm	6000 mm	5.00 kN	112.50 kg	show all inclusive accessoires	
ST 82-12F	1200 mm	6000 mm	5.00 kN	115.50 kg	show all inclusive accessoires	

Product: Product
width: width
length: length
Pmax: Maximum load
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

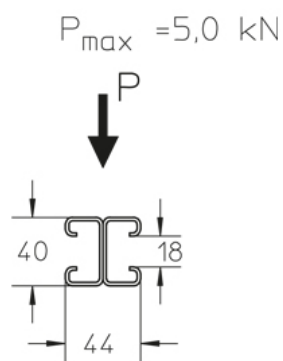

ACCESSORIES

STDE, STISD, STR 110, BGI, BGIQ, BL 7, SI, AC, HKI,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

