

STU 50

vertical cable ladder, unequal U-profile

vertical ladder, medium building class, with continuously perforated side beams, for fastening directly to walls or detached, riveted rungs made of profile rail 40x22 mm.

The cover RD can only be mounted in conjunction with the cover extension STD-A.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	length	Pmax	weight
STU 50-02-3S	210 mm	3000 mm	2.00 kN	9.75 kg	
STU 50-03-3S	300 mm	3000 mm	2.00 kN	10.35 kg	
STU 50-04-3S	400 mm	3000 mm	2.00 kN	10.90 kg	
STU 50-05-3S	500 mm	3000 mm	2.00 kN	11.50 kg	
STU 50-06-3S	600 mm	3000 mm	2.00 kN	12.05 kg	
STU 50-07-3S	700 mm	3000 mm	2.00 kN	12.65 kg	
STU 50-08-3S	800 mm	3000 mm	2.00 kN	13.25 kg	
STU 50-02S	210 mm	6000 mm	2.00 kN	19.50 kg	
STU 50-03S	300 mm	6000 mm	2.00 kN	20.70 kg	
STU 50-04S	400 mm	6000 mm	2.00 kN	21.80 kg	
STU 50-05S	500 mm	6000 mm	2.00 kN	23.00 kg	
STU 50-06S	600 mm	6000 mm	2.00 kN	24.10 kg	
STU 50-07S	700 mm	6000 mm	2.00 kN	25.30 kg	
STU 50-08S	800 mm	6000 mm	2.00 kN	26.50 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	Pmax	weight
STU 50-02-3F	210 mm	3000 mm	2.00 kN	10.50 kg	
STU 50-03-3F	300 mm	3000 mm	2.00 kN	11.05 kg	
STU 50-04-3F	400 mm	3000 mm	2.00 kN	11.65 kg	
STU 50-05-3F	500 mm	3000 mm	2.00 kN	12.30 kg	
STU 50-06-3F	600 mm	3000 mm	2.00 kN	12.90 kg	
STU 50-07-3F	700 mm	3000 mm	2.00 kN	13.55 kg	
STU 50-08-3F	800 mm	3000 mm	2.00 kN	14.15 kg	
STU 50-02F	210 mm	6000 mm	2.00 kN	21.00 kg	
STU 50-03F	300 mm	6000 mm	2.00 kN	22.10 kg	
STU 50-04F	400 mm	6000 mm	2.00 kN	23.30 kg	
STU 50-05F	500 mm	6000 mm	2.00 kN	24.60 kg	

Артикул	Product	width	length	Pmax	weight
STU 50-06F	600 mm	6000 mm	2.00 kN	25.80 kg	
STU 50-07F	700 mm	6000 mm	2.00 kN	27.10 kg	
STU 50-08F	800 mm	6000 mm	2.00 kN	28.30 kg	

Product: Product




width: width

length: length

Pmax: Maximum load

weight: weight

DETAILS / APPLICATIONS

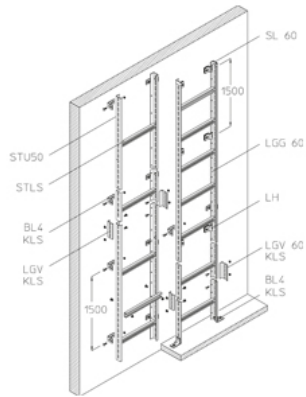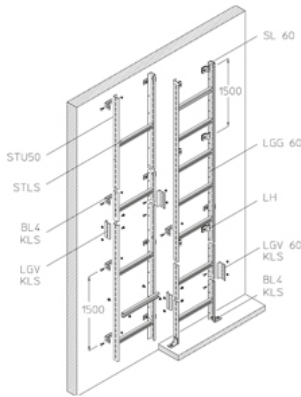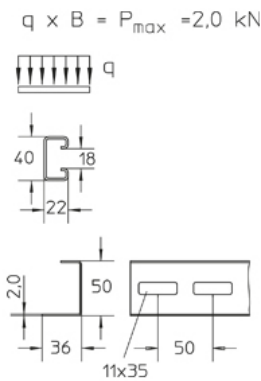

ACCESSORIES

STLS, STR 50, BGU 50, LH, SU 50/36, STD-A, ST-RD, STR 110, BL 4, AC, LGV 50,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

