

STU 60

vertical cable ladder, equal U-profile

Vertical ladder, heavy building class, with continuously three-way perforated side beams, beams made of U-profile 60x40x4 mm, rungs made of profile rail 40x22 mm to be screwed in.

Beams and rungs are delivered not mounted including screws and nuts. The cover RD can only be mounted in conjunction with the cover extension STD-A.



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	Pmax	weight	incl.
STU 60-02-3F	200 mm	3000 mm	2.00 kN	22.98 kg	show all inclusive accessoires	
STU 60-03-3F	300 mm	3000 mm	2.00 kN	23.75 kg	show all inclusive accessoires	
STU 60-04-3F	400 mm	3000 mm	2.00 kN	24.52 kg	show all inclusive accessoires	
STU 60-05-3F	500 mm	3000 mm	2.00 kN	24.95 kg	show all inclusive accessoires	
STU 60-06-3F	600 mm	3000 mm	2.00 kN	26.06 kg	show all inclusive accessoires	
STU 60-07-3F	700 mm	3000 mm	2.00 kN	26.84 kg	show all inclusive accessoires	
STU 60-08-3F	800 mm	3000 mm	2.00 kN	27.61 kg	show all inclusive accessoires	
STU 60-09-3F	900 mm	3000 mm	2.00 kN	28.38 kg	show all inclusive accessoires	
STU 60-10-3F	1000 mm	3000 mm	2.00 kN	28.81 kg	show all inclusive accessoires	
STU 60-11-3F	1100 mm	3000 mm	2.00 kN	29.93 kg	show all inclusive accessoires	
STU 60-12-3F	1200 mm	3000 mm	2.00 kN	30.70 kg	show all inclusive accessoires	
STU 60-02F	200 mm	6000 mm	2.00 kN	45.95 kg	show all inclusive accessoires	
STU 60-03F	300 mm	6000 mm	2.00 kN	47.49 kg	show all inclusive accessoires	
STU 60-04F	400 mm	6000 mm	2.00 kN	49.04 kg	show all inclusive accessoires	
STU 60-05F	500 mm	6000 mm	2.00 kN	50.58 kg	show all inclusive accessoires	
STU 60-06F	600 mm	6000 mm	2.00 kN	52.12 kg	show all inclusive accessoires	
STU 60-07F	700 mm	6000 mm	2.00 kN	53.67 kg	show all inclusive accessoires	
STU 60-08F	800 mm	6000 mm	2.00 kN	55.21 kg	show all inclusive accessoires	
STU 60-09F	900 mm	6000 mm	2.00 kN	56.76 kg	show all inclusive accessoires	
STU 60-10F	1000 mm	6000 mm	2.00 kN	58.30 kg	show all inclusive accessoires	
STU 60-11F	1100 mm	6000 mm	2.00 kN	59.85 kg	show all inclusive accessoires	
STU 60-12F	1200 mm	6000 mm	2.00 kN	61.39 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	length	Pmax	weight	incl.
STU 60-02-3E	200 mm	3000 mm	2.00 kN	21.67 kg	show all inclusive accessoires	
STU 60-03-3E	300 mm	3000 mm	2.00 kN	22.41 kg	show all inclusive accessoires	

Артикул	Product	width	length	Pmax	weight	incl.
STU 60-04-3E	400 mm	3000 mm	2.00 kN	23.16 kg	show all inclusive accessoires	
STU 60-05-3E	500 mm	3000 mm	2.00 kN	24.09 kg	show all inclusive accessoires	
STU 60-06-3E	600 mm	3000 mm	2.00 kN	24.65 kg	show all inclusive accessoires	
STU 60-07-3E	700 mm	3000 mm	2.00 kN	25.39 kg	show all inclusive accessoires	
STU 60-08-3E	800 mm	3000 mm	2.00 kN	26.14 kg	show all inclusive accessoires	
STU 60-09-3E	900 mm	3000 mm	2.00 kN	26.88 kg	show all inclusive accessoires	
STU 60-10-3E	1000 mm	3000 mm	2.00 kN	27.62 kg	show all inclusive accessoires	
STU 60-11-3E	1100 mm	3000 mm	2.00 kN	28.37 kg	show all inclusive accessoires	
STU 60-12-3E	1200 mm	3000 mm	2.00 kN	29.11 kg	show all inclusive accessoires	
STU 60-02E	200 mm	6000 mm	2.00 kN	43.34 kg	show all inclusive accessoires	
STU 60-03E	300 mm	6000 mm	2.00 kN	44.83 kg	show all inclusive accessoires	
STU 60-04E	400 mm	6000 mm	2.00 kN	46.32 kg	show all inclusive accessoires	
STU 60-05E	500 mm	6000 mm	2.00 kN	47.80 kg	show all inclusive accessoires	
STU 60-06E	600 mm	6000 mm	2.00 kN	49.29 kg	show all inclusive accessoires	
STU 60-07E	700 mm	6000 mm	2.00 kN	50.78 kg	show all inclusive accessoires	
STU 60-08E	800 mm	6000 mm	2.00 kN	52.27 kg	show all inclusive accessoires	
STU 60-09E	900 mm	6000 mm	2.00 kN	53.76 kg	show all inclusive accessoires	
STU 60-10E	1000 mm	6000 mm	2.00 kN	55.25 kg	show all inclusive accessoires	
STU 60-11E	1100 mm	6000 mm	2.00 kN	56.74 kg	show all inclusive accessoires	
STU 60-12E	1200 mm	6000 mm	2.00 kN	58.23 kg	show all inclusive accessoires	

Product: Product

width: width




length: length


Pmax: Maximum load

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

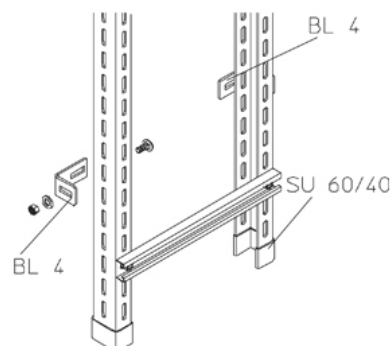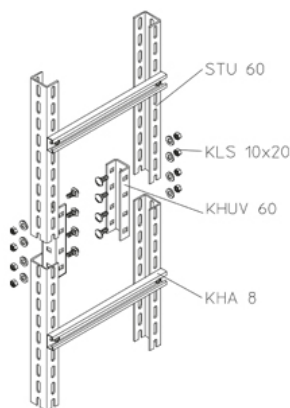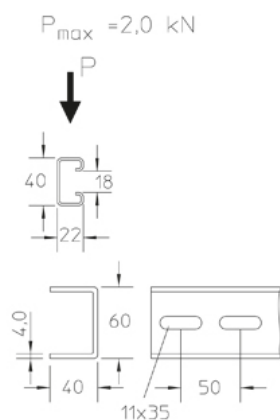

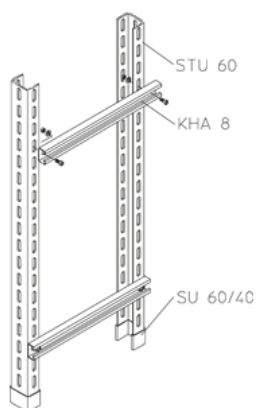

ACCESSORIES

STUS 60, STD-A, ST-RD, STR 110, BGU 60, KHUV 60, BL 4, SU 60, AC,



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

