


## WLV 200

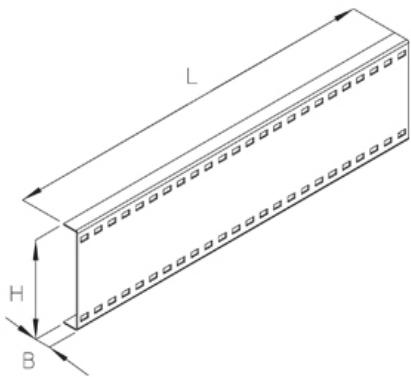

wide-span connector, height = 200 mm

In order to compensate for the heat expansion one side of the connector is mounted as a loose bearing. The given torques must be observed. The other side of the connector is to be mounted as a fixed bearing. A minimum distance of 4mm must be kept between the cable trays.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight	incl.
WLV 200S	203 mm	34 mm	799 mm	2.50 mm	4.05 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight	incl.
WLV 200F	203 mm	34 mm	799 mm	2.50 mm	4.34 kg	show all inclusive accessoires	

**Product:** Product

**height:** height

**width:** width


**length:** length

**t:** material thickness

**weight:** weight

**incl.:** incl.

## DETAILS / APPLICATIONS

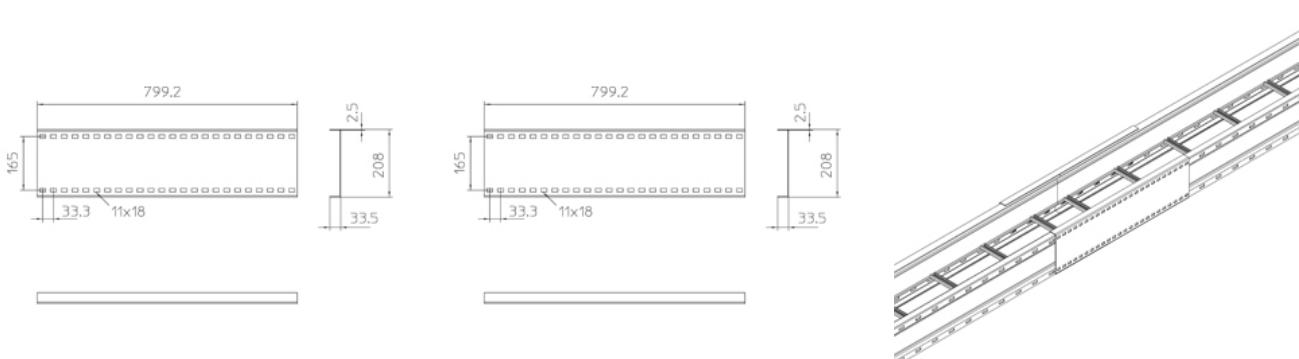

# Информация о продукции

---

