


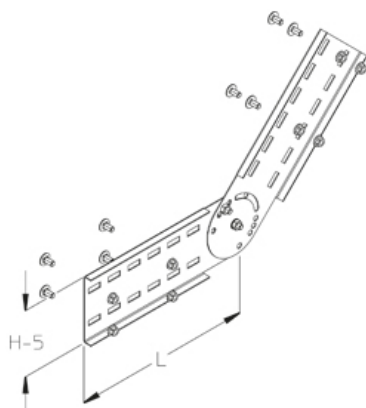

WPVV 150

wide-span connector, vertical, height = 145 mm

All other angles up to 90° maximum are to be set above the elongated holes I. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	length	weight	incl.
WPVV 150S	150 mm	377 mm	2.43 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	length	weight	incl.
WPVV 150F	150 mm	377 mm	2.60 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	length	weight	incl.
WPVV 150E	150 mm	377 mm	2.43 kg	show all inclusive accessoires	

Product: Product


height: height

length: length

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

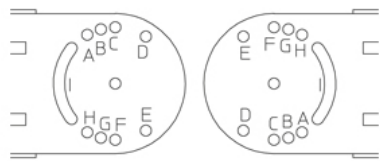

15° C + G
18° E + B
30° A + F
45° B + H
60° A + H

