


## WLKDR

wide-span cable ladder crossing cover with turning bolts

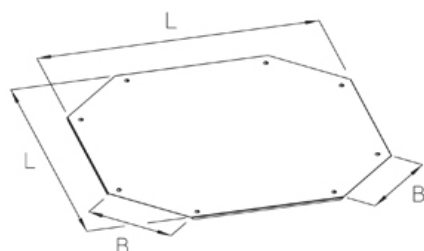

Cover for wide-span cable ladder crossing. With additional turning bolts.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул   | Product | height | width   | length  | t        | weight |
|-----------|---------|--------|---------|---------|----------|--------|
| WLKDR 20S | 10 mm   | 240 mm | 1042 mm | 0.75 mm | 4.78 kg  |        |
| WLKDR 30S | 10 mm   | 340 mm | 1142 mm | 1.00 mm | 8.09 kg  |        |
| WLKDR 40S | 10 mm   | 440 mm | 1242 mm | 1.00 mm | 9.96 kg  |        |
| WLKDR 50S | 10 mm   | 540 mm | 1342 mm | 1.25 mm | 14.98 kg |        |
| WLKDR 60S | 10 mm   | 640 mm | 1442 mm | 1.25 mm | 17.72 kg |        |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул   | Product | height | width   | length  | t        | weight |
|-----------|---------|--------|---------|---------|----------|--------|
| WLKDR 20F | 10 mm   | 240 mm | 1042 mm | 0.75 mm | 5.10 kg  |        |
| WLKDR 30F | 10 mm   | 340 mm | 1142 mm | 1.00 mm | 8.64 kg  |        |
| WLKDR 40F | 10 mm   | 440 mm | 1242 mm | 1.00 mm | 10.64 kg |        |
| WLKDR 50F | 10 mm   | 540 mm | 1342 mm | 1.25 mm | 16.02 kg |        |
| WLKDR 60F | 10 mm   | 640 mm | 1442 mm | 1.25 mm | 18.94 kg |        |

**Product:** Product

**height:** height

**width:** width

**length:** length

**t:** material thickness

**weight:** weight

## DETAILS / APPLICATIONS

