


WPD-A

cover elevator

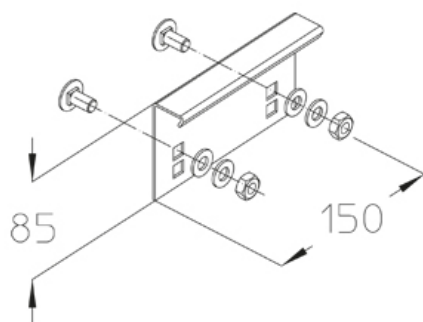

Cover elevator for the elevation of wide-span tray covers (6 WPD-A/3m). The covers must be secured with cover clips at a distance of 100 mm from the cover ends and in the middle (6 WPDUK/3m). In wind-exposed areas, the number must be increased to at least ten WPD-A and WPDUK per 3m. In the interior, securing with cover clips is optional. The filling volume of the route remains unchanged.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	weight	incl.
WPD-A S	85 mm	150 mm	0.35 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	weight	incl.
WPD-A F	85 mm	150 mm	0.35 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	weight	incl.
WPD-A E	85 mm	150 mm	0.35 kg	show all inclusive accessoires	

Product: Product

height: height

width: width

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

