


WPLK 150

wide-span crossing, height = 150 mm

wide-span crossing for horizontal change of direction, with integrated connectors

Formed components must be supported at all sides. This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.

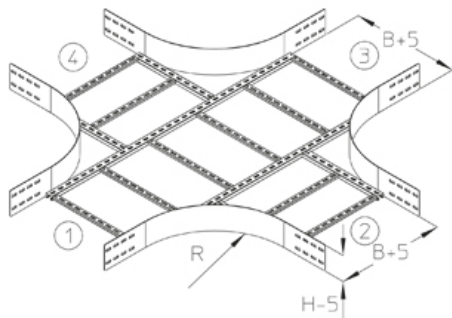

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	radius	weight	incl.
WPLK 150-20F	150 mm	200 mm	450 mm	25.42 kg	show all inclusive accessoires	
WPLK 150-30F	150 mm	300 mm	450 mm	26.48 kg	show all inclusive accessoires	
WPLK 150-40F	150 mm	400 mm	450 mm	27.45 kg	show all inclusive accessoires	
WPLK 150-50F	150 mm	500 mm	450 mm	28.42 kg	show all inclusive accessoires	
WPLK 150-60F	150 mm	600 mm	450 mm	29.78 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	radius	weight	incl.
WPLK 150-20E	150 mm	200 mm	450 mm	24 kg	show all inclusive accessoires	
WPLK 150-30E	150 mm	300 mm	450 mm	25 kg	show all inclusive accessoires	
WPLK 150-40E	150 mm	400 mm	450 mm	25.92 kg	show all inclusive accessoires	
WPLK 150-50E	150 mm	500 mm	450 mm	26.84 kg	show all inclusive accessoires	
WPLK 150-60E	150 mm	600 mm	450 mm	28.12 kg	show all inclusive accessoires	

Product: Product

height: height

width: width

radius: radius

weight: weight

incl.: incl.

ACCESSORIES

WPKD,



UL classified

