


WL 200

wide-span cable ladder, height = 200 mm



Wide-span cable ladder, additional transverse rigidity due to welded rungs made of profile rungs. Electrical conductivity tested according to DIN EN 61537.

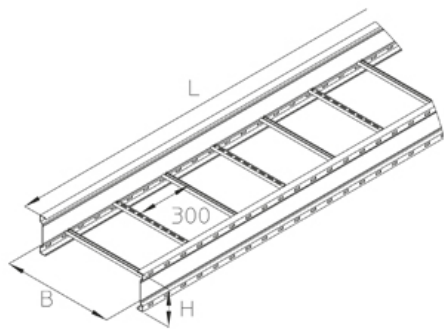

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight
WL 200-20S	202 mm	200 mm	6000 mm	2.00 mm	56.22 kg	
WL 200-30S	202 mm	300 mm	6000 mm	2.00 mm	57.98 kg	
WL 200-40S	202 mm	400 mm	6000 mm	2.00 mm	59.76 kg	
WL 200-50S	202 mm	500 mm	6000 mm	2.00 mm	61.52 kg	
WL 200-60S	202 mm	600 mm	6000 mm	2.00 mm	63.23 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
WL 200-20F	202 mm	200 mm	6000 mm	2.00 mm	60.15 kg	
WL 200-30F	202 mm	300 mm	6000 mm	2.00 mm	62.03 kg	
WL 200-40F	202 mm	400 mm	6000 mm	2.00 mm	63.94 kg	
WL 200-50F	202 mm	500 mm	6000 mm	2.00 mm	65.82 kg	
WL 200-60F	202 mm	600 mm	6000 mm	2.00 mm	67.70 kg	

Product: Product

height: height



width: width

length: length


t: material thickness

weight: weight

LOAD DIAGRAM

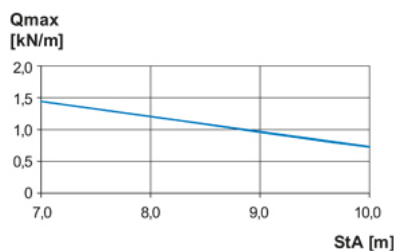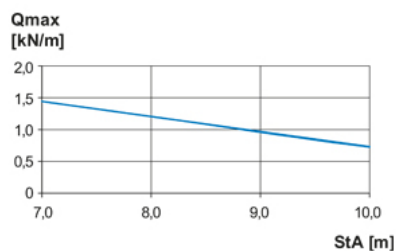

DETAILS / APPLICATIONS

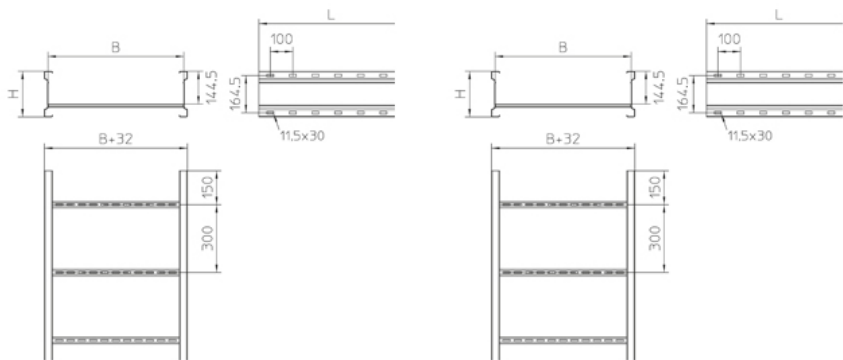

ACCESSORIES

WLB 200, WLA 200, WLK 200, WLD, WLDR, WLHS, WLKL, WLKLA, WLKLT, WLV 200, WLVH 200, WLVV 200, WTR 200,



Do not walk upon!



TÜV certified

