




WPR 120

wide-span cable tray, height = 120 mm

Wide-span cable tray, additional transverse rigidity due to welded and ripped inlay sheet. Electrical conductivity tested according to DIN EN 61537.

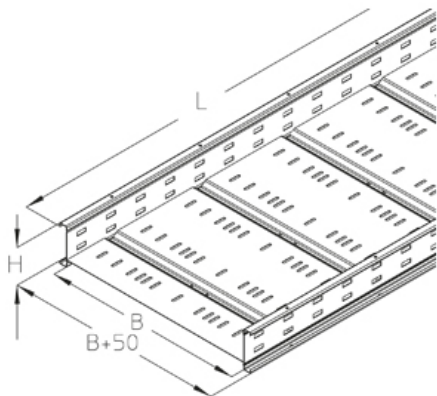

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	QLK	weight
WPR 120-20S	120 mm	200 mm	6000 mm	1.50 mm	196 cm ²	0.29 kN/m	0.55 kN/m	36.42 kg	
WPR 120-30S	120 mm	300 mm	6000 mm	1.50 mm	294 cm ²	0.44 kN/m	0.82 kN/m	42.10 kg	
WPR 120-40S	120 mm	400 mm	6000 mm	1.50 mm	392 cm ²	0.59 kN/m	1.10 kN/m	47.96 kg	
WPR 120-50S	120 mm	500 mm	6000 mm	1.50 mm	490 cm ²	0.74 kN/m	1.37 kN/m	53.84 kg	
WPR 120-60S	120 mm	600 mm	6000 mm	1.50 mm	588 cm ²	0.88 kN/m	1.65 kN/m	59.70 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	QLK	weight
WPR 120-20F	120 mm	200 mm	6000 mm	1.50 mm	196 cm ²	0.29 kN/m	0.55 kN/m	38.97 kg	
WPR 120-30F	120 mm	300 mm	6000 mm	1.50 mm	294 cm ²	0.44 kN/m	0.82 kN/m	45.05 kg	
WPR 120-40F	120 mm	400 mm	6000 mm	1.50 mm	392 cm ²	0.59 kN/m	1.10 kN/m	51.32 kg	
WPR 120-50F	120 mm	500 mm	6000 mm	1.50 mm	490 cm ²	0.74 kN/m	1.37 kN/m	57.61 kg	
WPR 120-60F	120 mm	600 mm	6000 mm	1.50 mm	588 cm ²	0.88 kN/m	1.65 kN/m	63.88 kg	

Product: Product

height: height

width: width

length: length

t: material thickness


A: cross section area

QSK: distributed load control cable


QLK: distributed load power cable

weight: weight

LOAD DIAGRAM

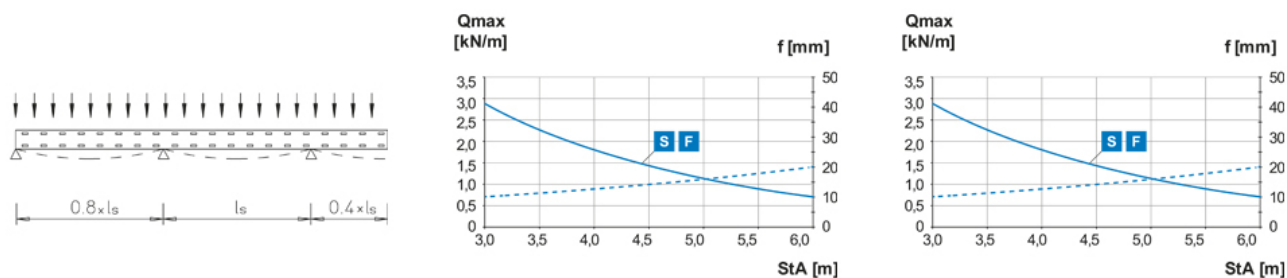

DETAILS / APPLICATIONS

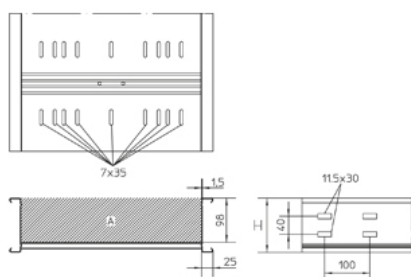

ACCESSORIES

WPEA 120, WPREAB 120, WPRB 120, WPRA 120, WPRAA 120, WPRK 120, WPD, WPHS-K, WPHS-A, WPHS-P, WPHS-IS, WPV 120, WPVH 120, WPVV 120, WPTR 120, WPRKAB, WPREB, VB, H,



Do not walk upon!



UL classified

