


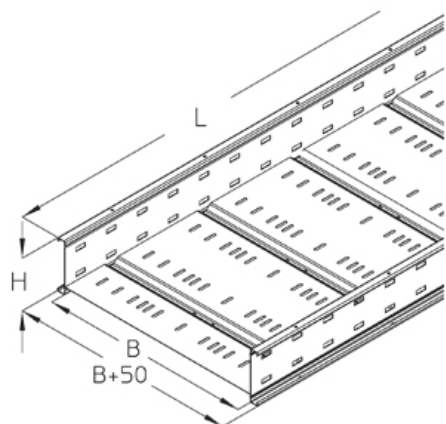

WPR 150

wide-span cable tray, height = 150 mm

wide-span cable tray, additional transverse rigidity due to welded and ripped inlay sheet, certified including electrical conductivity according to DIN EN 61537

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
WPR 150-20S	150 mm	200 mm	6000 mm	1.75 mm	256 cm ²	0.38 kN/m	45.13 kg	
WPR 150-30S	150 mm	300 mm	6000 mm	1.75 mm	384 cm ²	0.58 kN/m	50.81 kg	
WPR 150-40S	150 mm	400 mm	6000 mm	1.75 mm	512 cm ²	0.77 kN/m	56.68 kg	
WPR 150-50S	150 mm	500 mm	6000 mm	1.75 mm	640 cm ²	0.96 kN/m	62.55 kg	
WPR 150-60S	150 mm	600 mm	6000 mm	1.75 mm	768 cm ²	1.15 kN/m	68.41 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	weight
WPR 150-20F	150 mm	200 mm	6000 mm	1.75 mm	256 cm ²	0.38 kN/m	48.28 kg	
WPR 150-30F	150 mm	300 mm	6000 mm	1.75 mm	384 cm ²	0.58 kN/m	54.36 kg	
WPR 150-40F	150 mm	400 mm	6000 mm	1.75 mm	512 cm ²	0.77 kN/m	60.64 kg	
WPR 150-50F	150 mm	500 mm	6000 mm	1.75 mm	640 cm ²	0.96 kN/m	66.92 kg	
WPR 150-60F	150 mm	600 mm	6000 mm	1.75 mm	768 cm ²	1.15 kN/m	73.20 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	A	QSK	weight
WPR 150-20E	150 mm	200 mm	6000 mm	1.75 mm	256 cm ²	0.38 kN/m	48.74 kg	
WPR 150-30E	150 mm	300 mm	6000 mm	1.75 mm	384 cm ²	0.58 kN/m	55.62 kg	
WPR 150-40E	150 mm	400 mm	6000 mm	1.75 mm	512 cm ²	0.77 kN/m	62.70 kg	
WPR 150-50E	150 mm	500 mm	6000 mm	1.75 mm	640 cm ²	0.96 kN/m	69.78 kg	
WPR 150-60E	150 mm	600 mm	6000 mm	1.75 mm	768 cm ²	1.15 kN/m	76.88 kg	

Product: Product

height: height

width: width

length: length


t: material thickness

A: cross section area


QSK: distributed load control cable

weight: weight

LOAD DIAGRAM

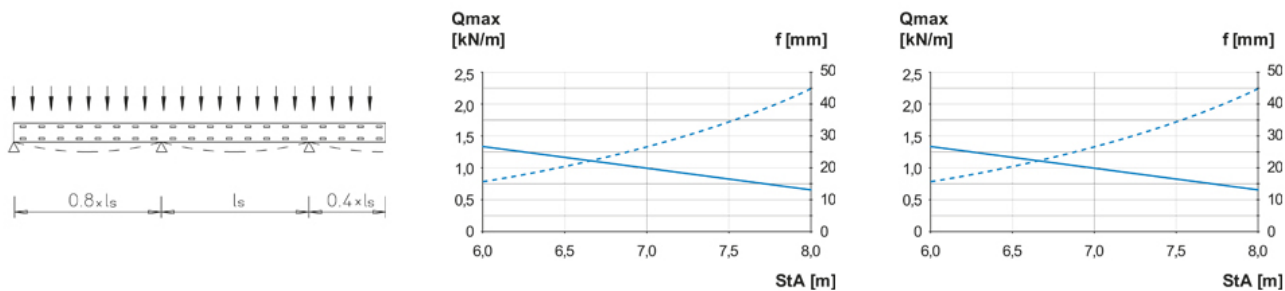

DETAILS / APPLICATIONS

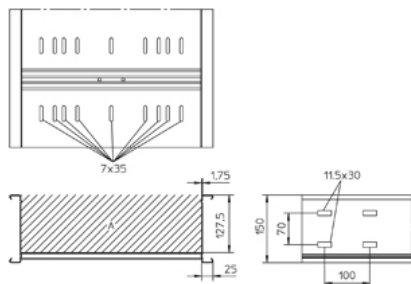

ACCESSORIES

WPEA 150, WPREAB 150, WPRB 150, WPRA 150, WPRAA 150, WPRK 150, WPD, WPHS-K, WPHS-A, WPHS-P, WPHS-IS, WPV 150, WPVH 150, WPVV 150, WPTR 150, WPRKAB, WPREB, VB, H,



Do not walk upon!



UL classified

