


RG 60

cable tray perforated escape route installations

cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537


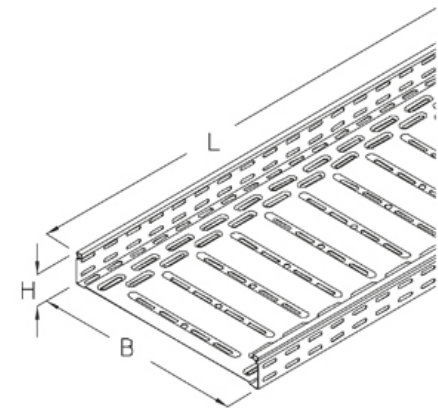


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
RG 60-10S	60 mm	100 mm	3000 mm	0.75 mm	57 cm ²	0.09 kN/m	4.30 kg	
RG 60-20S	60 mm	200 mm	3000 mm	0.75 mm	117 cm ²	0.18 kN/m	5.80 kg	
RG 60-30S	60 mm	300 mm	3000 mm	0.75 mm	177 cm ²	0.27 kN/m	7.40 kg	
RG 60-40S	60 mm	400 mm	3000 mm	0.88 mm	237 cm ²	0.36 kN/m	10.60 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
weight: weight

DETAILS / APPLICATIONS

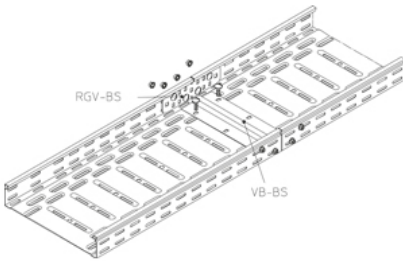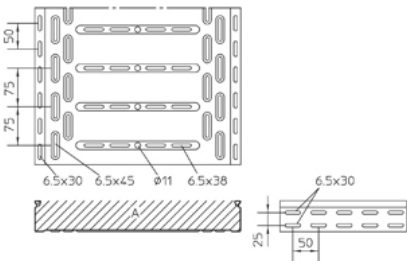

ACCESSORIES

RGV-BS 60, VB-BS,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

