


RGS 60

cable tray, perforated, heavy, height = 60 mm escape route installations

cable tray, heavy-duty, perforated head shape suitable for positive locking covers with longitudinal and lateral reinforcing rims reducing bottom deflection Electrical conductivity tested according to DIN EN 61537.


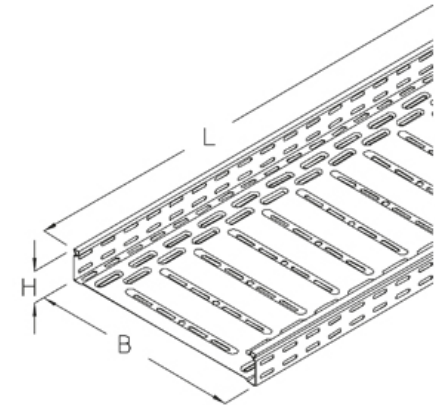


Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
RGS 60-10S	60 mm	100 mm	3000 mm	1.50 mm	57 cm ²	0.09 kN/m	8.30 kg	
RGS 60-20S	60 mm	200 mm	3000 mm	1.50 mm	117 cm ²	0.18 kN/m	11.30 kg	
RGS 60-30S	60 mm	300 mm	3000 mm	1.50 mm	177 cm ²	0.27 kN/m	14.60 kg	
RGS 60-40S	60 mm	400 mm	3000 mm	1.50 mm	237 cm ²	0.36 kN/m	18.00 kg	
RGS 60-50S	60 mm	500 mm	3000 mm	1.50 mm	297 cm ²	0.45 kN/m	21.30 kg	
RGS 60-60S	60 mm	600 mm	3000 mm	1.50 mm	357 cm ²	0.54 kN/m	24.60 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
weight: weight

DETAILS / APPLICATIONS

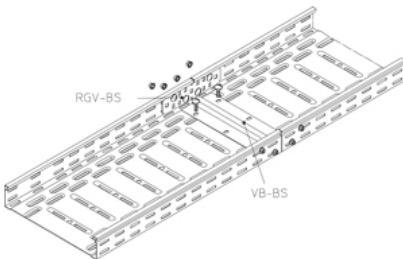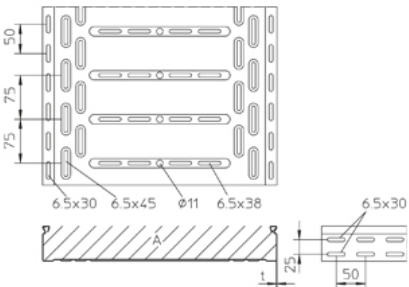

ACCESSORIES

RGV-BS 60, VB-BS,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)

