


VB-BS

connection plate escape route installations

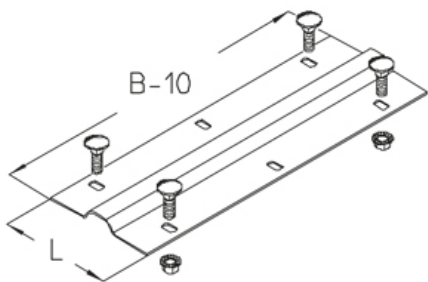

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул   | Product | width | length  | weight                         | incl. |
|-----------|---------|-------|---------|--------------------------------|-------|
| VB-BS 10S | 100 mm  | 99 mm | 0.10 kg | show all inclusive accessoires |       |
| VB-BS 20S | 200 mm  | 99 mm | 0.21 kg | show all inclusive accessoires |       |
| VB-BS 30S | 300 mm  | 99 mm | 0.31 kg | show all inclusive accessoires |       |
| VB-BS 40S | 400 mm  | 99 mm | 0.43 kg | show all inclusive accessoires |       |
| VB-BS 50S | 500 mm  | 99 mm | 0.52 kg | show all inclusive accessoires |       |
| VB-BS 60S | 600 mm  | 99 mm | 0.60 kg | show all inclusive accessoires |       |

**Product:** Product  
**width:** width  
**length:** length  
**weight:** weight  
**incl.:** incl.

DETAILS / APPLICATIONS

