


GB

threaded rod, DIN 976-1

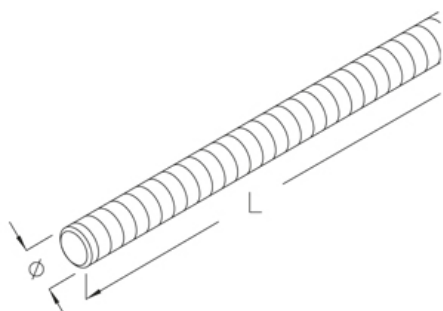

Stress-areas according to DIN 267-4: GB M8 = 36.6 mm , GB M10 = 58.0 mm , GB M12 = 84.3 mm . The producte can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

galvanized, according to ISO 4042

Артикул	Product	length	diameter	weight
GB M8-03	300 mm	8 mm	8.20 kg/100	
GB M8-05	500 mm	8 mm	15.30 kg/100	
GB M8-10	1000 mm	8 mm	30.70 kg/100	
GB M10-03	300 mm	10 mm	14.10 kg/100	
GB M10-05	500 mm	10 mm	24.30 kg/100	
GB M10-10	1000 mm	10 mm	49.70 kg/100	
GB M12-03	300 mm	12 mm	21.70 kg/100	
GB M12-05	500 mm	12 mm	36.20 kg/100	
GB M12-10	1000 mm	12 mm	72.50 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	length	diameter	weight
GB M8-10E	1000 mm	8 mm	30.90 kg/100	
GB M10-10E	1000 mm	10 mm	50.01 kg/100	
GB M12-10E	1000 mm	12 mm	72.96 kg/100	

Product: Product

length: length

diameter: diameter

weight: weight

