


KHA 8

profile rail 40x22 mm, perforated escape route installations

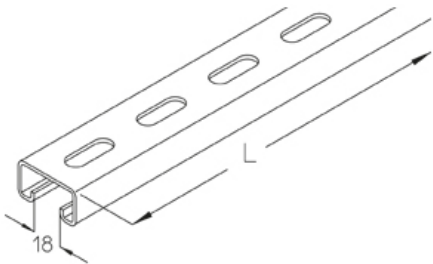

profile rail 40x22x2.00 mm, with continuous perforation 11x30, slot size 18 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHA 8-01F	22 mm	40 mm	100 mm	2.00 mm	0.14 kg	
KHA 8-02F	22 mm	40 mm	200 mm	2.00 mm	0.30 kg	
KHA 8-03F	22 mm	40 mm	300 mm	2.00 mm	0.46 kg	
KHA 8-04F	22 mm	40 mm	400 mm	2.00 mm	0.60 kg	
KHA 8-05F	22 mm	40 mm	500 mm	2.00 mm	0.76 kg	
KHA 8-06F	22 mm	40 mm	600 mm	2.00 mm	0.90 kg	
KHA 8-07F	22 mm	40 mm	700 mm	2.00 mm	1.06 kg	

Product: Product

height: height


width: width

length: length

t: material thickness

weight: weight

DETAILS / APPLICATIONS

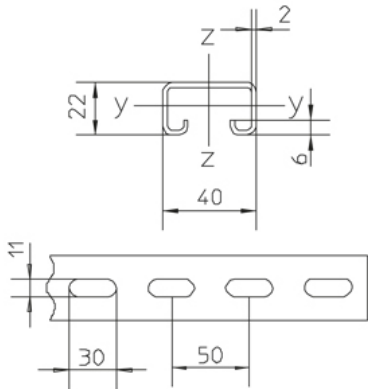



ACCESSORIES

ASK 8, HS18, AM18, AMF18,

