


SD-BS

straddling dowel, fire protection

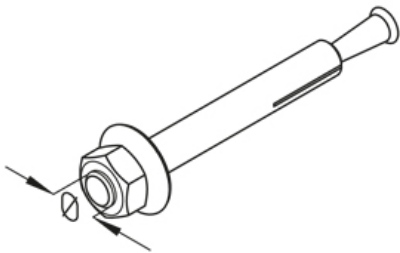

Permissible as single fastening. Permissible load in cracked and non-cracked normal concrete of strength $\geq C20/25$. Manufacturer's information has to be observed strictly (ETA-06/0175).

galvanized, according to ISO 4042

Артикул	Product	Lmin	diameter	diameter	t	Pzul	PzulR30	PzulR90	weight
SD-BS 6/5	36 mm	6 mm	6 mm	0-5 mm	2.40 kN	1,0 kN	0,4 kN	0.01 kg	

Product: Product

Lmin: Minimum drilling depth

diameter: diameter

diameter: diameter

t: material thickness

Pzul: permissible tractive force

PzulR30: permissible tensile load under the influence of fire (30min)

PzulR90: permissible tensile load under the influence of fire (90min)

weight: weight

DETAILS / APPLICATIONS

