


SEM

hexagon-nut, DIN 934

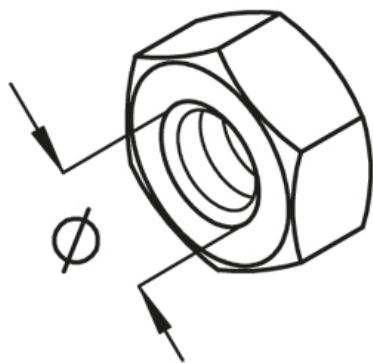

galvanized, according to ISO 4042

Артикул	Product	diameter	t	SW	weight
SEM 6	6 mm	5.00 mm	10 mm	0.30 kg/100	
SEM 8	8 mm	6.50 mm	13 mm	0.50 kg/100	
SEM 10	10 mm	8.00 mm	17(15) mm	1.00 kg/100	
SEM 12	12 mm	10.00 mm	19(18) mm	1.40 kg/100	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	diameter	t	SW	weight
SEM 10F	10 mm	8.00 mm	17(15) mm	1.00 kg/100	
SEM 12F	12 mm	10.00 mm	19(18) mm	1.70 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	t	SW	weight
SEM 6E	6 mm	5.00 mm	10 mm	0.30 kg/100	
SEM 8E	8 mm	6.50 mm	13 mm	0.50 kg/100	
SEM 10E	10 mm	8.00 mm	17(15) mm	1.00 kg/100	
SEM 12E	12 mm	10.00 mm	19(18) mm	1.40 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	diameter	t	SW	weight
SEM 6E4	6 mm	5.00 mm	10 mm	0.30 kg/100	
SEM 8E4	8 mm	6.50 mm	13 mm	0.50 kg/100	
SEM 10E4	10 mm	8.00 mm	17(15) mm	1.00 kg/100	
SEM 12E4	12 mm	10.00 mm	19(18) mm	1.60 kg/100	

Product: Product**diameter:** diameter

t: material thickness

SW: wrench size

weight: weight

DETAILS / APPLICATIONS

