


US 125

washer, DIN 125

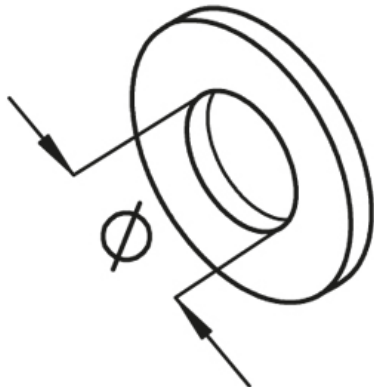

galvanized, according to ISO 4042

Артикул	Product	diameter	diameter	t	weight
US 6X12	12.50 mm	6.40 mm	1.60 mm	0.10 kg/100	
US 8X17	17 mm	8.40 mm	2.00 mm	0.20 kg/100	
US 10X21	21 mm	10.50 mm	2.00 mm	0.40 kg/100	
US 13X24	24 mm	13 mm	2.50 mm	0.60 kg/100	
US 17X30	30 mm	17 mm	3.00 mm	0.90 kg/100	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	diameter	diameter	t	weight
US 10X21F	21 mm	10.50 mm	2.00 mm	0.40 kg/100	
US 13X24F	24 mm	13 mm	2.50 mm	0.60 kg/100	
US 17X30F	30 mm	17 mm	3.00 mm	0.90 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	diameter	t	weight
US 6X12E	12.50 mm	6.40 mm	1.50 mm	0.10 kg/100	
US 8X17E	17 mm	8.40 mm	1.50 mm	0.20 kg/100	
US 10X21E	21 mm	10.50 mm	2.00 mm	0.40 kg/100	
US 13X24E	24 mm	13 mm	2.50 mm	0.60 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	diameter	diameter	t	weight
US 6X12E4	12.50 mm	6.40 mm	1.50 mm	0.10 kg/100	
US 8X17E4	17 mm	8.40 mm	1.50 mm	0.20 kg/100	
US 10X21E4	21 mm	10.50 mm	2.00 mm	0.20 kg/100	

diameter: diameter

diameter: diameter

t: material thickness

weight: weight

DETAILS / APPLICATIONS

