


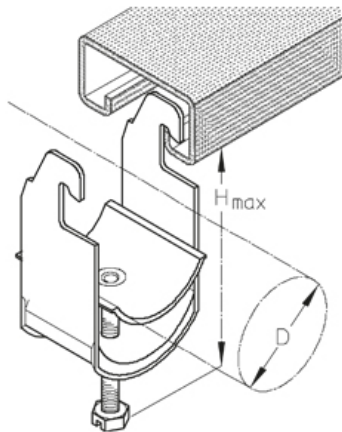

AC

cable clamp for fastening to C-profile rails Maintenance of function - Standard support structures

Cable clamp with full-surface vat made of galvanised steel.

Articles with a diameter of 12-56mm are also available in stainless steel finish, material No. 1.4571 / 1.4404 (V4A). The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 AC	8-12 mm	41 mm	2 Nm	1	2.70 kg/100	
16 AC	12-16 mm	46 mm	2 Nm	1	3.10 kg/100	
20 AC	16-20 mm	50 mm	2 Nm	1	3.50 kg/100	
24 AC	20-24 mm	54 mm	2 Nm	1	3.70 kg/100	
28 AC	24-28 mm	58 mm	2 Nm	1	4.20 kg/100	
32 AC	28-32 mm	63 mm	2 Nm	1	6.40 kg/100	
36 AC	32-36 mm	67 mm	2 Nm	1	6.70 kg/100	
40 AC	36-40 mm	71 mm	2 Nm	1	7.50 kg/100	
44 AC	40-44 mm	81 mm	4 Nm	1	9.60 kg/100	
48 AC	44-48 mm	85 mm	4 Nm	1	9.80 kg/100	
52 AC	48-52 mm	90 mm	4 Nm	1	10.70 kg/100	
56 AC	52-56 mm	94 mm	4 Nm	1	11.50 kg/100	
60 AC	56-60 mm	98 mm	4 Nm	1	15.10 kg/100	
64 AC	60-64 mm	102 mm	4 Nm	1	15.90 kg/100	
70 AC	64-70 mm	109 mm	4 Nm	1	16.90 kg/100	
76 AC	70-76 mm	113 mm	4 Nm	1	23.30 kg/100	
82 AC	76-82 mm	119 mm	4 Nm	1	25.80 kg/100	
88 AC	82-88 mm	125 mm	4 Nm	1	27.30 kg/100	
94 AC	88-94 mm	131 mm	4 Nm	1	29.60 kg/100	
100 AC	94-100 mm	137 mm	4 Nm	1	32 kg/100	
110 AC	100-110 mm	157 mm	4 Nm	1	35 kg/100	
120 AC	110-120 mm	167 mm	4 Nm	1	37.40 kg/100	

Product: Product

diameter: diameter


Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

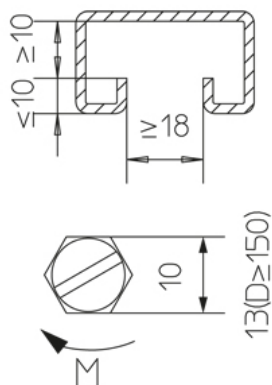

ACCESSORIES

LW, KHA 7, KHA 8,

