


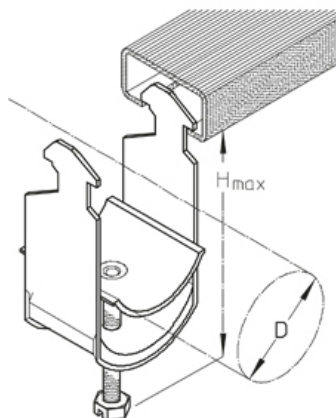

H

cable clamp for fastening to C-profile rails Maintenance of function - Standard support structures

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C) with a slot size of 16 mm.

Articles with a diameter of 12-56mm are also available in stainless steel finish, material No. 1.4571 / 1.4404 (V4A). The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 H	8-12 mm	41 mm	2 Nm	1	2.70 kg/100	
16 H	12-16 mm	46 mm	2 Nm	1	3.20 kg/100	
20 H	16-20 mm	50 mm	2 Nm	1	3.60 kg/100	
24 H	20-24 mm	54 mm	2 Nm	1	3.90 kg/100	
28 H	24-28 mm	58 mm	2 Nm	1	4.40 kg/100	
32 H	28-32 mm	63 mm	2 Nm	1	6.30 kg/100	
36 H	32-36 mm	67 mm	2 Nm	1	7 kg/100	
40 H	36-40 mm	71 mm	2 Nm	1	7.50 kg/100	
44 H	40-44 mm	81 mm	4 Nm	1	9.80 kg/100	
48 H	44-48 mm	85 mm	4 Nm	1	10.20 kg/100	
52 H	48-52 mm	90 mm	4 Nm	1	10.60 kg/100	
56 H	52-56 mm	94 mm	4 Nm	1	11.30 kg/100	
60 H	56-60 mm	98 mm	4 Nm	1	15.80 kg/100	
64 H	60-64 mm	102 mm	4 Nm	1	16.50 kg/100	
70 H	64-70 mm	109 mm	4 Nm	1	17.10 kg/100	

Product: Product

diameter: diameter


Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

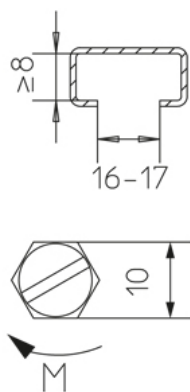

ACCESSORIES

LW, KHB 7,

