


LW

extended counter vat Maintenance of function - Standard support structures

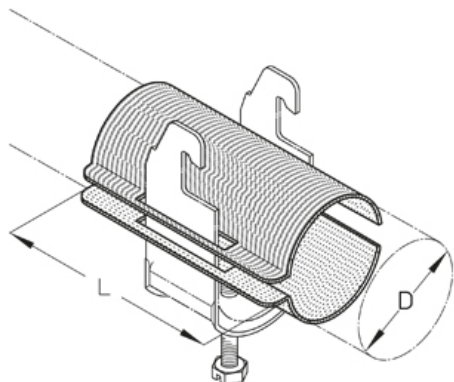

long trough for improved cable support

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	length	diameter	weight
LW 12	70 mm	9-12 mm	0.92 kg/100	
LW 16	70 mm	13-16 mm	0.97 kg/100	
LW 20	70 mm	17-20 mm	1.24 kg/100	
LW 24	70 mm	21-24 mm	1.52 kg/100	
LW 28	70 mm	25-28 mm	1.79 kg/100	
LW 32	70 mm	29-32 mm	2.18 kg/100	
LW 36	70 mm	33-36 mm	2.34 kg/100	
LW 40	70 mm	37-40 mm	2.62 kg/100	
LW 44	70 mm	41-44 mm	3.08 kg/100	
LW 48	70 mm	45-48 mm	3.39 kg/100	
LW 52	70 mm	49-52 mm	3.64 kg/100	
LW 56	70 mm	53-56 mm	3.98 kg/100	
LW 60	70 mm	57-60 mm	4.26 kg/100	
LW 64	70 mm	61-64 mm	4.53 kg/100	
LW 70	70 mm	65-70 mm	5.95 kg/100	
LW 76	70 mm	71-76 mm	11.50 kg/100	
LW 82	100 mm	77-82 mm	12.30 kg/100	
LW 88	100 mm	83-88 mm	13.00 kg/100	
LW 94	100 mm	89-94 mm	13.80 kg/100	
LW 100	100 mm	95-100 mm	15.00 kg/100	
LW 110	100 mm	101-110 mm	16.50 kg/100	
LW 120	100 mm	111-120 mm	17.80 kg/100	

Product: Product

length: length

diameter: diameter

weight: weight



ACCESSORIES

Н,

