


W

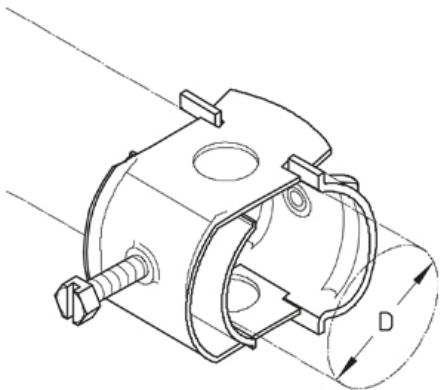

cable clamp for wall fastening Maintenance of function - Standard support structures

cable clamp, hot-dip galvanized, for fastening directly to walls



The producte can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Zinc coated

Артикул	Product	diameter	torque	weight
16 W	12-16 mm	2 Nm	4.40 kg/100	
20 W	16-20 mm	2 Nm	5.40 kg/100	
24 W	20-24 mm	2 Nm	5.80 kg/100	
28 W	24-28 mm	2 Nm	6.30 kg/100	
32 W	28-32 mm	4 Nm	8.50 kg/100	
36 W	32-36 mm	4 Nm	9.10 kg/100	
44 W	36-44 mm	4 Nm	13.50 kg/100	
52 W	44-52 mm	4 Nm	16.50 kg/100	
60 W	52-60 mm	4 Nm	19.50 kg/100	

Product: Product
diameter: diameter
torque: torque
weight: weight

DETAILS / APPLICATIONS

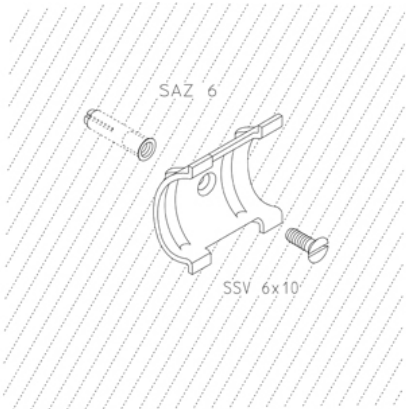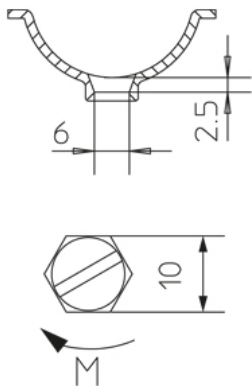



ACCESSORIES

LW, SSV, SAZ,

