


RB-BS 60

cable tray bend, height = 60 mm Maintenance of function, specified system

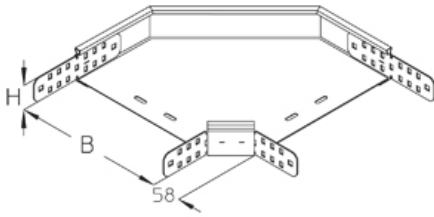

cable tray bend, 90°, for horizontal change of direction with integrated connectors

The products can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	weight	incl.
RB-BS 60-10S	60 mm	100 mm	0.80 kg	show all inclusive accessoires	
RB-BS 60-20S	60 mm	200 mm	1.27 kg	show all inclusive accessoires	
RB-BS 60-30S	60 mm	300 mm	1.92 kg	show all inclusive accessoires	
RB-BS 60-40S	60 mm	400 mm	2.75 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	weight	incl.
RB-BS 60-10F	60 mm	100 mm	0.92 kg	show all inclusive accessoires	
RB-BS 60-20F	60 mm	200 mm	1.38 kg	show all inclusive accessoires	
RB-BS 60-30F	60 mm	300 mm	2.14 kg	show all inclusive accessoires	
RB-BS 60-40F	60 mm	400 mm	2.46 kg	show all inclusive accessoires	

Product: Product

height: height

width: width

weight: weight

incl.: incl.

ACCESSORIES

VB-BS,

