


## RB-BS45 60

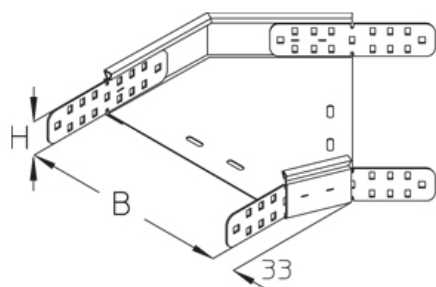

cable tray bend, height = 60 mm Maintenance of function, specified system

cable tray bend 45 , for horizontal change of direction with integrated connectors

The products can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	weight	incl.
RB-BS45 60-10S	60 mm	100 mm	0.71 kg	show all inclusive accessoires	
RB-BS45 60-20S	60 mm	200 mm	1.05 kg	show all inclusive accessoires	
RB-BS45 60-30S	60 mm	300 mm	1.40 kg	show all inclusive accessoires	
RB-BS45 60-40S	60 mm	400 mm	1.84 kg	show all inclusive accessoires	

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	weight	incl.
RB-BS45 60-10F	60 mm	100 mm	0.64 kg	show all inclusive accessoires	
RB-BS45 60-20F	60 mm	200 mm	0.90 kg	show all inclusive accessoires	
RB-BS45 60-30F	60 mm	300 mm	1.49 kg	show all inclusive accessoires	
RB-BS45 60-40F	60 mm	400 mm	1.87 kg	show all inclusive accessoires	

**Product:** Product

**height:** height

**width:** width

**weight:** weight

**incl.:** incl.

## ACCESSORIES

VB-BS,

