


VB-BS

connection plate Maintenance of function, specified system

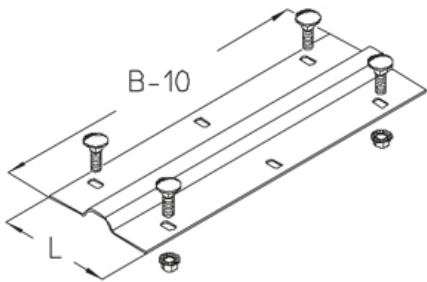

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	length	weight	incl.
VB-BS 10S	100 mm	99 mm	0.10 kg	show all inclusive accessoires	
VB-BS 20S	200 mm	99 mm	0.21 kg	show all inclusive accessoires	
VB-BS 30S	300 mm	99 mm	0.31 kg	show all inclusive accessoires	
VB-BS 40S	400 mm	99 mm	0.43 kg	show all inclusive accessoires	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	weight	incl.
VB-BS 10F	100 mm	99 mm	0.10 kg	show all inclusive accessoires	
VB-BS 20F	200 mm	99 mm	0.23 kg	show all inclusive accessoires	
VB-BS 30F	300 mm	99 mm	0.33 kg	show all inclusive accessoires	
VB-BS 40F	400 mm	99 mm	0.45 kg	show all inclusive accessoires	

Product: Product

width: width

length: length

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

