


## UBP VR

dummy cover assembly opening

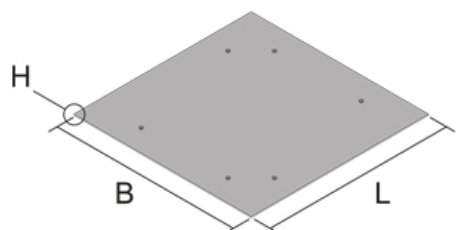

Steel sheet as an optional accessory for the temporary covering of a mounting opening in hollow floors or screed floors caused by the removal of a shuttering unit or plastic formworks. (Diameter: 307 mm and 261x261 mm) With press-in threaded bolt to prevent slipping.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул   | Product | height | width  | length  | t       | Pmax    | weight |
|-----------|---------|--------|--------|---------|---------|---------|--------|
| UBP-VR 2S | 8 mm    | 330 mm | 330 mm | 2.00 mm | 0.75 kN | 1.71 kg |        |

**Product:** Product

**height:** height

**width:** width

**length:** length

**t:** material thickness

**Pmax:** Maximum load

**weight:** weight

## DETAILS / APPLICATIONS

