


## UNSKH V

heat resistant shuttering unit, levellable, angular

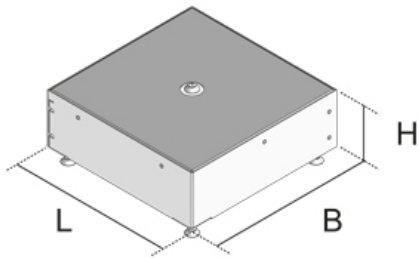

Shuttering unit, levellable, quadrangular, in floor boxes or cable duct mounting cover, consisting of a sendzimir galvanized steel sheet frame, an internal levelling device including levelling bases and cover. As concealed shuttering for quadrangular installation units, sandable and heat resistant. Suitable for installation in cast asphalt/hot asphalt or terrazzo.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	Hmin	N	width	length	weight
UNSKH 260V-100S	96 mm	100 mm	+55 mm	259 mm	259 mm	1.53 kg	
UNSKH 260V-155S	96 mm	155 mm	+70 mm	259 mm	259 mm	2.64 kg	

**Product:** Product  
**height:** height  
**Hmin:** Minimum installation height  
**N:** levelling range  
**width:** width  
**length:** length  
**weight:** weight

