


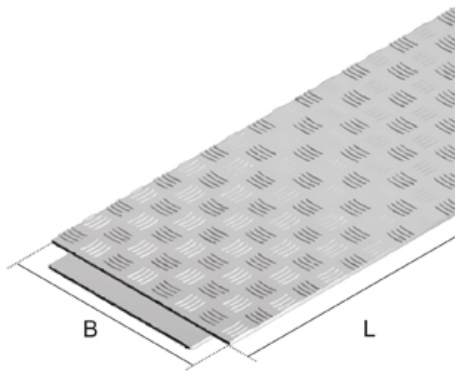

UBKD

dummy cover

Dummy cover made of hot-dip galvanized bulb plate, to be applied to the side profiles of the screed-flush heavy-duty duct's bottom piece. The bulb plates according to EN 10025 / DIN 59220 achieve the slip-resistant properties R 10 / V 10 according to BGR 181 and DIN 51130.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	t	Pmax	weight
UBKD5 25F	238 mm	1000 mm	5.00 mm	5 kN	9.80 kg	
UBKD5 35F	338 mm	1000 mm	5.00 mm	5 kN	13.70 kg	
UBKD5 45F	438 mm	1000 mm	5.00 mm	5 kN	17.70 kg	
UBKD8 25F	250 mm	1000 mm	8.00 mm	15 kN	15.70 kg	
UBKD8 35F	350 mm	1000 mm	8.00 mm	15 kN	22 kg	
UBKD8 45F	450 mm	1000 mm	8.00 mm	15 kN	28.30 kg	
UBKD10 25F	250 mm	1000 mm	10.00 mm	25 kN	19.70 kg	
UBKD10 35F	350 mm	1000 mm	10.00 mm	25 kN	27.50 kg	
UBKD10 45F	450 mm	1000 mm	10.00 mm	25 kN	35.40 kg	

Product: Product

width: width

length: length

t: material thickness

Pmax: Maximum load

weight: weight

DETAILS / APPLICATIONS

