


UEBSESK

end piece, cartridge

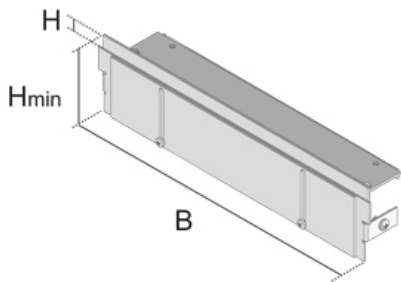

End piece cartridge, can be adjusted to floor cover height, for the sealing of screed-flush duct.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	Hmin	N	width	weight
UEBSESK15 60-20S	12 mm	60 mm	+50 mm	200 mm	0.57 kg	
UEBSESK15 60-30S	12 mm	60 mm	+50 mm	300 mm	0.88 kg	
UEBSESK15 60-40S	12 mm	60 mm	+50 mm	400 mm	1.18 kg	
UEBSESK15 60-50S	12 mm	60 mm	+50 mm	500 mm	1.38 kg	
UEBSESK15 100-20S	12 mm	100 mm	+50 mm	200 mm	0.68 kg	
UEBSESK15 100-30S	12 mm	100 mm	+50 mm	300 mm	1.05 kg	
UEBSESK15 100-40S	12 mm	100 mm	+50 mm	400 mm	1.42 kg	
UEBSESK15 100-50S	12 mm	100 mm	+50 mm	500 mm	1.68 kg	
UEBSESK25 60-20S	22 mm	60 mm	+50 mm	200 mm	0.60 kg	
UEBSESK25 60-30S	22 mm	60 mm	+50 mm	300 mm	0.93 kg	
UEBSESK25 60-40S	22 mm	60 mm	+50 mm	400 mm	1.25 kg	
UEBSESK25 60-50S	22 mm	60 mm	+50 mm	500 mm	1.46 kg	
UEBSESK25 100-20S	22 mm	100 mm	+50 mm	200 mm	0.71 kg	
UEBSESK25 100-30S	22 mm	100 mm	+50 mm	300 mm	1.21 kg	
UEBSESK25 100-40S	22 mm	100 mm	+50 mm	400 mm	1.49 kg	
UEBSESK25 100-50S	22 mm	100 mm	+50 mm	500 mm	1.76 kg	

Product: Product
height: height
Hmin: Minimum installation height
N: levelling range
width: width
weight: weight

