


UEBS

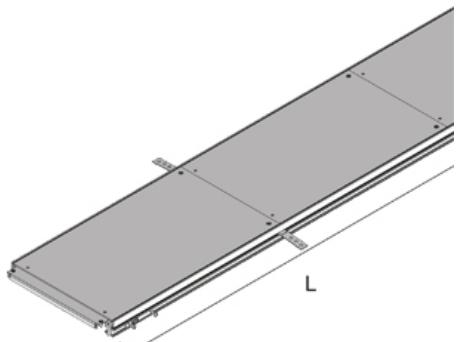

screed-flush duct, 1-compartment

Screed-flush duct, open system with removable covers for the horizontal duct course. Consisting of pre-assembled aluminium side profiles with rubber seal, dummy covers made of steel sheet, cross beams, screed anchors and carpet profiles. Can be separated using separating strips. As basic version in the systems steel sheet side profiles, plastic side profile for the impact sound decoupling and as a closed tub for the laying of EMV cables. Suitable for rooms with dry and damp-cleaned floor covers. Designed for office traffic loads.

Screed-flush duct system consisting of 1x duct UEBS and optional accessories, 2x side panels UEBSMSP, respectively 1x tub UEBSMSW and 4x levelling units UEBSST.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	Hmin	N	width	length	E	t	Pmax	IPn	weight	
UEBS 20S	60 mm	+90 mm	200 mm	2000 mm	400 mm	3.00 mm	3 kN	IP 30	15.14 kg	show all inclusive accessoires	
UEBS 30S	60 mm	+90 mm	300 mm	2000 mm	500 mm	3.00 mm	3 kN	IP 30	20.30 kg	show all inclusive accessoires	
UEBS 40S	60 mm	+90 mm	400 mm	2000 mm	600 mm	3.00 mm	3 kN	IP 30	25.46 kg	show all inclusive accessoires	
UEBS 50S	60 mm	+90 mm	500 mm	2000 mm	700 mm	3.00 mm	3 kN	IP 30	30.86 kg	show all inclusive accessoires	

Product: Product

Hmin: Minimum installation height

N: levelling range

width: width

length: length

E: fitting dimension


t: material thickness

Pmax: Maximum load

IPn: IP protection level in unused condition

weight: weight

DETAILS / APPLICATIONS

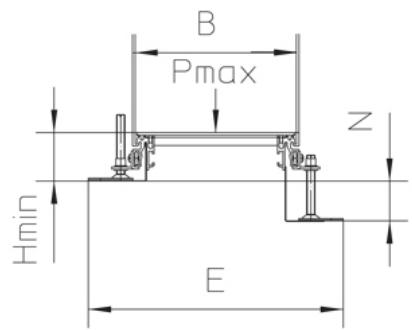

ACCESSORIES

UEBSMSW, UEBSMSP, UEBSMSP S, UEBSSST, UEBSQT, UEBSQT S, UEBSQTF S,

