


## UEBSMSP S

steel sheet side panels

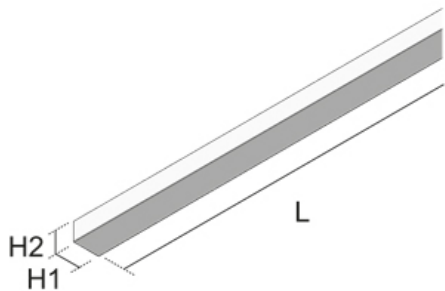

The side panels consisting of two turnable steel sheet profiles in connection with the levelling support provide height adjustment and shuttering of the screed-flush duct.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	height	Hmin	N	length	weight
UEBSMSP 60S	48 mm	68 mm	60 mm	+50 mm	2000 mm	1.35 kg	
UEBSMSP 100S	88 mm	108 mm	100 mm	+50 mm	2000 mm	2.29 kg	
UEBSMSP 150S	88 mm	138 mm	100 mm	+80 mm	2000 mm	2.65 kg	
UEBSMSP 180S	88 mm	168 mm	100 mm	+110 mm	2000 mm	2.99 kg	

**Product:** Product  
**height:** height  
**height:** height  
**Hmin:** Minimum installation height  
**N:** levelling range  
**length:** length  
**weight:** weight

## DETAILS / APPLICATIONS

