


UEBSMSW

floor tub

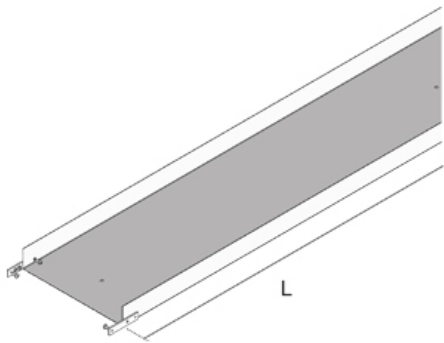

Floor tub for screed-flush duct made of steel sheet including connector for the all-round shielded laying of cables.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	Hmin	N	width	length	weight
UEBSMSW 60-20S	60 mm	+30 mm	200 mm	2000 mm	4.28 kg	
UEBSMSW 60-30S	60 mm	+30 mm	300 mm	2000 mm	5.85 kg	
UEBSMSW 60-40S	60 mm	+30 mm	400 mm	2000 mm	7.42 kg	
UEBSMSW 60-50S	60 mm	+30 mm	500 mm	2000 mm	8.99 kg	
UEBSMSW 80-20S	80 mm	+30 mm	200 mm	2000 mm	4.91 kg	
UEBSMSW 80-30S	80 mm	+30 mm	300 mm	2000 mm	6.48 kg	
UEBSMSW 80-40S	80 mm	+30 mm	400 mm	2000 mm	8.05 kg	
UEBSMSW 80-50S	80 mm	+30 mm	500 mm	2000 mm	9.62 kg	
UEBSMSW 100-20S	100 mm	+30 mm	200 mm	2000 mm	5.54 kg	
UEBSMSW 100-30S	100 mm	+30 mm	300 mm	2000 mm	7.11 kg	
UEBSMSW 100-40S	100 mm	+30 mm	400 mm	2000 mm	8.68 kg	
UEBSMSW 100-50S	100 mm	+30 mm	500 mm	2000 mm	10.25 kg	
UEBSMSW 120-20S	120 mm	+30 mm	200 mm	2000 mm	6.17 kg	
UEBSMSW 120-30S	120 mm	+30 mm	300 mm	2000 mm	7.74 kg	
UEBSMSW 120-40S	120 mm	+30 mm	400 mm	2000 mm	9.31 kg	
UEBSMSW 120-50S	120 mm	+30 mm	500 mm	2000 mm	10.87 kg	

Product: Product
Hmin: Minimum installation height
N: levelling range
width: width
length: length
weight: weight

