



KHU 80

bracket support, heavy, 80x60 mm

Bracket support, U-profile 80x60x5 mm, continuously three-way perforated.



Higher loads can be achieved by using the support piece.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	weight	incl.
KHU 80-02F	80 mm	60 mm	200 mm	1.33 kg	show all inclusive accessoires	
KHU 80-03F	80 mm	60 mm	300 mm	2.00 kg	show all inclusive accessoires	
KHU 80-04F	80 mm	60 mm	400 mm	2.66 kg	show all inclusive accessoires	
KHU 80-05F	80 mm	60 mm	500 mm	3.33 kg	show all inclusive accessoires	
KHU 80-06F	80 mm	60 mm	600 mm	3.99 kg	show all inclusive accessoires	
KHU 80-07F	80 mm	60 mm	700 mm	4.66 kg	show all inclusive accessoires	
KHU 80-08F	80 mm	60 mm	800 mm	5.32 kg	show all inclusive accessoires	
KHU 80-09F	80 mm	60 mm	900 mm	5.99 kg	show all inclusive accessoires	
KHU 80-10F	80 mm	60 mm	1000 mm	6.65 kg	show all inclusive accessoires	
KHU 80-11F	80 mm	60 mm	1100 mm	7.32 kg	show all inclusive accessoires	
KHU 80-12F	80 mm	60 mm	1200 mm	7.98 kg	show all inclusive accessoires	
KHU 80-13F	80 mm	60 mm	1300 mm	8.65 kg	show all inclusive accessoires	
KHU 80-14F	80 mm	60 mm	1400 mm	9.32 kg	show all inclusive accessoires	
KHU 80-15F	80 mm	60 mm	1500 mm	9.98 kg	show all inclusive accessoires	
KHU 80-16F	80 mm	60 mm	1600 mm	10.65 kg	show all inclusive accessoires	
KHU 80-17F	80 mm	60 mm	1700 mm	11.31 kg	show all inclusive accessoires	
KHU 80-18F	80 mm	60 mm	1800 mm	11.98 kg	show all inclusive accessoires	
KHU 80-19F	80 mm	60 mm	1900 mm	12.64 kg	show all inclusive accessoires	
KHU 80-20F	80 mm	60 mm	2000 mm	13.31 kg	show all inclusive accessoires	
KHU 80-30F	80 mm	60 mm	3000 mm	19.96 kg	show all inclusive accessoires	
KHU 80-60F	80 mm	60 mm	6000 mm	39.92 kg	show all inclusive accessoires	

Product: Product
height: height
width: width
length: length
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

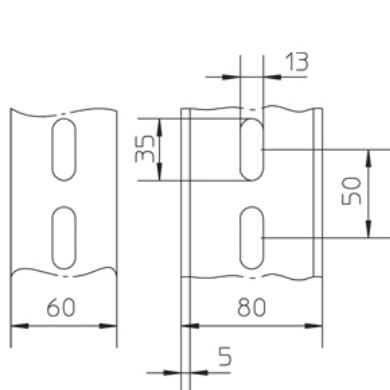

$$\begin{aligned} A_q &= 7.23 \text{ cm}^2 \\ W_y &= 7.61 \text{ cm}^3 \\ W_z &= 18.87 \text{ cm}^3 \\ I_y &= 30.11 \text{ cm}^4 \\ I_z &= 75.48 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} A_q &= 7.23 \text{ cm}^2 \\ W_y &= 7.61 \text{ cm}^3 \\ W_z &= 18.87 \text{ cm}^3 \\ I_y &= 30.11 \text{ cm}^4 \\ I_z &= 75.48 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

WPHS-K, KW, BGU 80, KHUV 80, KHUSS 80, SU 80, KLS,

