


KHA 8

profile rail 40x22 mm, perforated

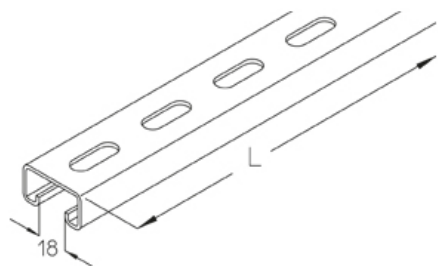

profile rail 40x22x2.00 mm, with continuous perforation 11x30, slot size 18 mm

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHA 8-01F	22 mm	40 mm	100 mm	2.00 mm	0.14 kg	
KHA 8-02F	22 mm	40 mm	200 mm	2.00 mm	0.30 kg	
KHA 8-03F	22 mm	40 mm	300 mm	2.00 mm	0.46 kg	
KHA 8-04F	22 mm	40 mm	400 mm	2.00 mm	0.60 kg	
KHA 8-05F	22 mm	40 mm	500 mm	2.00 mm	0.76 kg	
KHA 8-06F	22 mm	40 mm	600 mm	2.00 mm	0.90 kg	
KHA 8-07F	22 mm	40 mm	700 mm	2.00 mm	1.06 kg	
KHA 8-08F	22 mm	40 mm	800 mm	2.00 mm	1.20 kg	
KHA 8-09F	22 mm	40 mm	900 mm	2.00 mm	1.31 kg	
KHA 8-10F	22 mm	40 mm	1000 mm	2.00 mm	1.53 kg	
KHA 8-11F	22 mm	40 mm	1100 mm	2.00 mm	1.69 kg	
KHA 8-12F	22 mm	40 mm	1200 mm	2.00 mm	1.85 kg	
KHA 8-13F	22 mm	40 mm	1300 mm	2.00 mm	1.94 kg	
KHA 8-14F	22 mm	40 mm	1400 mm	2.00 mm	2.13 kg	
KHA 8-15F	22 mm	40 mm	1500 mm	2.00 mm	2.31 kg	
KHA 8-20F	22 mm	40 mm	2000 mm	2.00 mm	3.10 kg	
KHA 8-30F	22 mm	40 mm	3000 mm	2.00 mm	4.40 kg	
KHA 8-60F	22 mm	40 mm	6000 mm	2.00 mm	8.80 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	weight
KHA 8-02E4	22 mm	40 mm	200 mm	2.00 mm	0.30 kg	
KHA 8-03E4	22 mm	40 mm	300 mm	2.00 mm	0.45 kg	
KHA 8-04E4	22 mm	40 mm	400 mm	2.00 mm	0.60 kg	
KHA 8-05E4	22 mm	40 mm	500 mm	2.00 mm	0.75 kg	
KHA 8-06E4	22 mm	40 mm	600 mm	2.00 mm	0.90 kg	
KHA 8-07E4	22 mm	40 mm	700 mm	2.00 mm	1.05 kg	
KHA 8-08E4	22 mm	40 mm	800 mm	2.00 mm	1.20 kg	

Артикул	Product	height	width	length	t	weight
KHA 8-09E4	22 mm	40 mm	900 mm	2.00 mm	1.34 kg	
KHA 8-10E4	22 mm	40 mm	1000 mm	2.00 mm	1.50 kg	
KHA 8-11E4	22 mm	40 mm	1100 mm	2.00 mm	1.64 kg	
KHA 8-12E4	22 mm	40 mm	1200 mm	2.00 mm	1.79 kg	

Product: Product

height: height




width: width

length: length


t: material thickness

weight: weight

DETAILS / APPLICATIONS

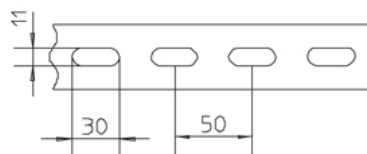

$$\begin{aligned}
 W_y &= 1.05 \text{ cm}^3 \\
 W_z &= 2.24 \text{ cm}^3 \\
 I_y &= 1.18 \text{ cm}^4 \\
 I_z &= 4.48 \text{ cm}^4
 \end{aligned}$$



$$\begin{aligned}
 W_y &= 1.05 \text{ cm}^3 \\
 W_z &= 2.24 \text{ cm}^3 \\
 I_y &= 1.18 \text{ cm}^4 \\
 I_z &= 4.48 \text{ cm}^4
 \end{aligned}$$

ACCESSORIES

SAI 21, ASK 8, SA 1, HS18, AM18, AMF18,

