


KHAL 41

profile rail 41x41 mm, perforated

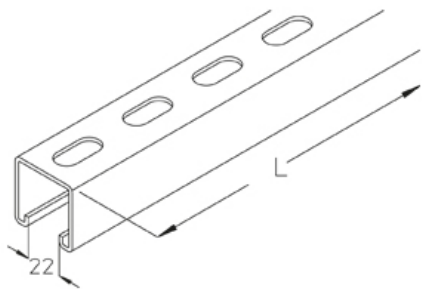

profile rail 41x41x1.50 mm, with continuous perforation 14x30, slot size 22 mm

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight
KHAL 41-30S	41 mm	41 mm	3000 mm	1.50 mm	4.68 kg	
KHAL 41-60S	41 mm	41 mm	6000 mm	1.50 mm	9.36 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight
KHAL 41-05F	41 mm	41 mm	500 mm	1.50 mm	0.80 kg	
KHAL 41-10F	41 mm	41 mm	1000 mm	1.50 mm	1.56 kg	
KHAL 41-15F	41 mm	41 mm	1500 mm	1.50 mm	2.34 kg	
KHAL 41-20F	41 mm	41 mm	2000 mm	1.50 mm	3.30 kg	
KHAL 41-30F	41 mm	41 mm	3000 mm	1.50 mm	4.68 kg	
KHAL 41-36F	41 mm	41 mm	3600 mm	1.50 mm	6.01 kg	
KHAL 41-60F	41 mm	41 mm	6000 mm	1.50 mm	9.36 kg	

Product: Product

height: height



width: width

length: length


t: material thickness

weight: weight

DETAILS / APPLICATIONS

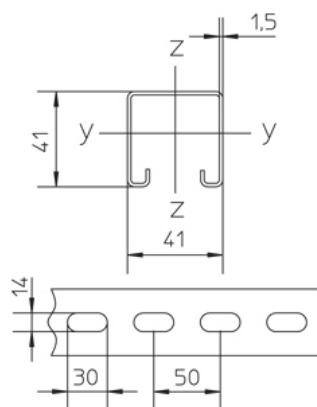

$$\begin{aligned} W_y &= 2.01 \text{ cm}^3 \\ W_z &= 2.91 \text{ cm}^3 \\ I_y &= 4.19 \text{ cm}^4 \\ I_z &= 5.96 \text{ cm}^4 \end{aligned}$$



$$\begin{aligned} W_y &= 2.01 \text{ cm}^3 \\ W_z &= 2.91 \text{ cm}^3 \\ I_y &= 4.19 \text{ cm}^4 \\ I_z &= 5.96 \text{ cm}^4 \end{aligned}$$

ACCESSORIES

SA 2, SAI 41, AM22, AMF22,

