


WPR 100

wide-span cable tray, height = 100 mm

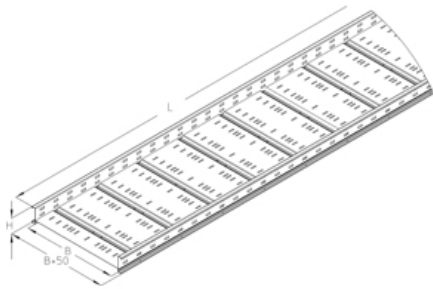

Wide-span cable tray, additional transverse rigidity due to welded and ripped inlay sheet. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.




Stainless steel, according to ASTM 304 / BS 304 S 3


Артикул	Product	height	width	length	t	A	QSK	QLK	weight
WPR 100-20E	100 mm	200 mm	6000 mm	1.50 mm	156 cm ²	0.23 kN/m	0.44 kN/m	36.26 kg	
WPR 100-30E	100 mm	300 mm	6000 mm	1.50 mm	234 cm ²	0.35 kN/m	0.66 kN/m	43.14 kg	
WPR 100-40E	100 mm	400 mm	6000 mm	1.50 mm	312 cm ²	0.47 kN/m	0.87 kN/m	50.26 kg	
WPR 100-50E	100 mm	500 mm	6000 mm	1.50 mm	390 cm ²	0.59 kN/m	1.09 kN/m	57.38 kg	
WPR 100-60E	100 mm	600 mm	6000 mm	1.50 mm	468 cm ²	0.70 kN/m	1.31 kN/m	64.48 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
QLK: distributed load power cable
weight: weight

LOAD DIAGRAM

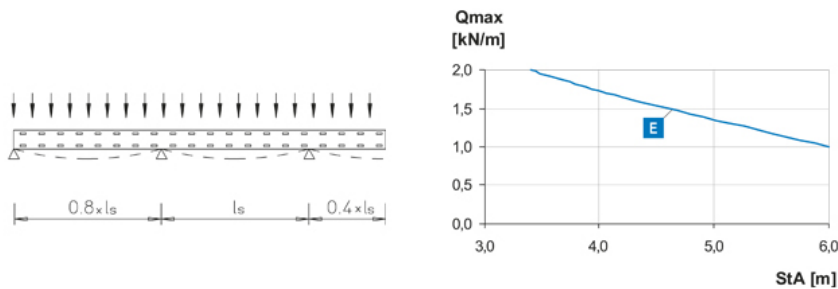

DETAILS / APPLICATIONS

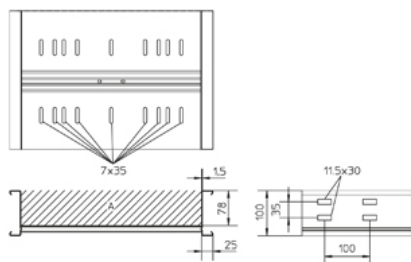

ACCESSORIES

WPEA 100, WPHS-K, WPHS-A, WPHS-P, WPHS-IS, WPV 100, WPVH 100, WPVV 100, WPTR 100, WPRKAB, WPREB, VB, H,



Do not walk upon!

